



## "On the Min-cost Traveling Salesman Problem with Drone"

Quang Minh Ha ; Yves Deville

### Abstract

Over the past few years, unmanned aerial vehicles (UAV), also known as drones, have been adopted as part of a new logistic method in the commercial sector called "last-mile delivery". In this novel approach, they are deployed alongside trucks to deliver goods to customers to improve the quality of service and reduce the transportation cost. This approach gives rise to a new variant of the traveling salesman problem (TSP), called TSP with drone (TSP-D). A variant of this problem that aims to minimize the time at which truck and drone finish the service (or, in other words, to maximize the quality of service) was studied in the work of Murray and Chu (2015). In contrast, this paper considers a new variant of TSP-D in which the objective is to minimize operational costs including total transportation cost and one created by waste time a vehicle has to wait for the other. The problem is first formulated mathematically. Then, two algorithms are proposed for the solution. The first algorit...

Document type : *Article de périodique (Journal article)*

## Référence bibliographique

---

Quang Minh Ha ; Yves Deville ; et. al. *On the Min-cost Traveling Salesman Problem with Drone*. In: *Transportation Research. Part C: Emerging Technologies*,

DOI : 10.1016/j.trc.2017.11.015

# On the Min-cost Traveling Salesman Problem with Drone

Quang Minh Ha

*quang.ha@uclouvain.be*

*ICTEAM, Université catholique de Louvain, Belgium*

Yves Deville

*yves.deville@uclouvain.be*

*ICTEAM, Université catholique de Louvain, Belgium*

Quang Dung Pham

*dungpq@soict.hust.edu.vn*

*SoICT, Hanoi University of Science and Technology, Vietnam*

Minh Hoàng Hà\*

*minhhoang.ha@vnu.edu.vn*

*University of Engineering and Technology, Vietnam National University, Vietnam*

---

## Abstract

Over the past few years, unmanned aerial vehicles (UAV), also known as drones, have been adopted as part of a new logistic method in the commercial sector called "last-mile delivery". In this novel approach, they are deployed alongside trucks to deliver goods to customers to improve the quality of service and reduce the transportation cost. This approach gives rise to a new variant of the traveling salesman problem (TSP), called TSP with drone (TSP-D). A variant of this problem that aims to minimize the time at which truck and drone finish the service (or, in other words, to maximize the quality of service) was studied in the work of Murray and Chu (2015). In contrast, this paper considers a new variant of TSP-D in which the objective is to mini-

---

\*Corresponding author

mize operational costs including total transportation cost and one created by waste time a vehicle has to wait for the other. The problem is first formulated mathematically. Then, two algorithms are proposed for the solution. The first algorithm (TSP-LS) was adapted from the approach proposed by Murray and Chu (2015), in which an optimal TSP solution is converted to a feasible TSP-D solution by local searches. The second algorithm, a Greedy Randomized Adaptive Search Procedure (GRASP), is based on a new split procedure that optimally splits any TSP tour into a TSP-D solution. After a TSP-D solution has been generated, it is then improved through local search operators. Numerical results obtained on various instances of both objective functions with different sizes and characteristics are presented. The results show that GRASP outperforms TSP-LS in terms of solution quality under an acceptable running time.

*Keywords:* Traveling Salesman Problem with Drone, Minimize operational cost, Integer programming, Heuristic, GRASP

---

## 1. Introduction

Companies always tend to look for the most cost-efficient methods to distribute goods across logistic networks (Rizzoli et al., 2007). Traditionally, trucks have been used to handle these tasks and the corresponding transportation problem is modelled as a traveling salesman problem (TSP). However, a  
5 new distribution method has recently arisen in which small unmanned aerial vehicles (UAV), also known as drones, are deployed to support parcel delivery. On the one hand, there are four advantages of using a drone for delivery: (1) it can be operated without a human pilot, (2) it avoids the congestion of  
10 traditional road networks by flying over them, (3) it is faster than trucks, and (4) it has much lower transportation costs per kilometre (WOHLSEN, 2014). On the other hand, because the drones are powered by batteries, their flight distance and lifting power are limited, meaning they are restricted in both maximum travel distance and parcel size. In contrast, a truck has the advan-

15 tage of long range travel capability. It can carry large and heavy cargo with a diversity of size, but it is also heavy, slow and has much higher transportation cost.

Consequently, the advantages of truck offset the disadvantages of drones and — similarly — the advantages of drones offset the disadvantages of  
20 trucks. These complementary capabilities are the foundation of a novel method named "last mile delivery with drone" (Banker, 2013), in which the truck transports the drone close to the customer locations, allowing the drone to service customers while remaining within its flight range, effectively increasing the usability and making the schedule more flexible for both drones and trucks.  
25 Specifically, a truck departs from the depot carrying the drone and all the customer parcels. As the truck makes deliveries, the drone is launched from the truck to service a nearby customer with a parcel. While the drone is in service, the truck continues its route to further customer locations. The drone then returns to the truck at a location different from its launch point.

30 From the application perspective, a number of remarkable events have occurred since 2013, when Amazon CEO Jeff Bezos first announced Amazon's plans for drone delivery (News, 2013), termed "a big surprise." Recently, Google has been awarded a patent that outlines its drone delivery method (Murphy, 2016). In detail, rather than trying to land, the drone will fly above  
35 the target, slowly lowering packages on a tether. More interestingly, it will be able to communicate with humans using voice messages during the delivery process. Google initiated this important drone delivery project, called Wing, in 2014, and it is expected to launch in 2017 (Grothaus, 2016). A similar Amazon project called Amazon Prime Air ambitiously plans to deliver  
40 packages by drone within 30 minutes (Pogue, 2016). Other companies worldwide have also been testing delivery services using drones. In April 2016, Australia Post successfully tested drones for delivering small packages. That project is reportedly headed towards a full customer trial in late 2016 (Cuthbertson, 2016). In May 2016, a Japanese company—Rakuten—launched a service named "Sora Kaku" that "delivers golf equipment, snacks, beverages and  
45

other items to players at pickup points on the golf course" (News, 2016). In medical applications, Matternet, a California-based startup, has been testing drone deliveries of medical supplies and specimens (such as blood samples) in many countries since 2011. According to their CEO: it is "much more cost-  
50 , energy- and time-efficient to send [a blood sample] via drone, rather than send it in a two-ton car down the highway with a person inside to bring it to a different lab for testing," (French, 2015). Additionally, a Silicon Valley start-up named Zipline International began using drones to deliver medicine in Rwanda starting in July, 2016 (Toor, 2016).

55 We are aware of several publications in the literature that have investigated the routing problem related to the truck-drone combination for delivery. (Murray and Chu, 2015) introduced the problem, calling it the "Flying Sidekick Traveling Salesman Problem" (FSTSP). A mixed integer linear programming (MILP) formulation and a heuristic are proposed. Basically, their  
60 heuristic is based on a "Truck First, Drone Second" idea, in which they first construct a route for the truck by solving a TSP problem and, then, repeatedly run a relocation procedure to reduce the objective value. In detail, the relocation procedure iteratively checks each node from the TSP tour and tries to consider whether it is suitable for use as a drone node. The change is applied  
65 immediately when this is true, and the current node is never checked again. Otherwise, the node is relocated to other positions in an effort to improving the objective value. The relocation procedure for TSP-D is designed in a "best improvement" fashion; it evaluates all the possible moves and executes the best one. The proposed methods are tested only on small-sized instances with  
70 up to 10 customers.

(Agatz et al., 2016), study a slightly different problem—called the "Traveling Salesman Problem with Drone" (TSP-D), in which the drone has to follow the same road network as the truck. Moreover, in TSP-D, the drone may be launched and return to the same location, while this is forbidden in the FSTSP.  
75 This problem is also modelled as a MILP formulation and solved by a "Truck First, Drone Second" heuristic in which drone route construction is based on

either local search or dynamic programming. Recently, (Bouman et al., 2017) extended this work by proposing an exact approach based on dynamic programming that is able to solve larger instances. Furthermore, (Ponza, 2016) also extended the work of Murray and Chu (Murray and Chu, 2015) in his master's thesis to solve the FSTSP, proposing an enhancement to the MILP model and solving the problem by a heuristic method based on Simulated Annealing.

Additionally, Wang et al. (Wang et al., 2016), in a recent research, introduced a more general problem that copes with multiple trucks and drones with the goal of minimizing the completion time. The authors named the problem "The vehicle routing problem with drone" (VRP-D) and conducted the analysis on several worst-case scenarios, from which they propose bounds on the best possible savings in time when using drones and trucks instead of trucks alone. An further development of this research is studied in (Poikonen et al., 2017) where the authors extend the worst-case bounds to more generic distance/cost metrics as well as explicitly consider the limitation of battery life and cost objectives.

All the works mentioned above aim to minimize the time at which the truck and the drone complete the route and return to the depot, which can improve the quality of service (Nozick and Turnquist, 2001). However, in every logistics activities, operational costs also play an important role in the overall business cost (see (Dawn Russell and Thomchick, 2014) and (Robinson, 2014)). Hence, minimizing these costs by using a more cost-efficient approach is a vital objective of every company involved in transport and logistics activities. Recently, an objective function that minimizes the transportation cost was studied by Mathew et al. (Mathew et al., 2015) for a related problem called the Heterogeneous Delivery Problem (HDP). However, unlike in (Murray and Chu, 2015) and (Agatz et al., 2016), the problem is modelled on a directed physical street network where a truck cannot achieve direct delivery to the customer. Instead, from the endpoint of an arc, the truck can launch a drone that will service the customers. In this way, the problem can be favourably

transformed to a Generalized Traveling Salesman Problem (GTSP) (Gutin and Punnen, 2006). The authors use the Nood-Bean Transformation available in  
110 Matlab to reduce a GTSP to a TSP, which is then solved by a heuristic proposed in the study. To the best of our knowledge, the min-cost objective function has not been studied for TSP-D when the problem is defined in a more realistic way—similarly to (Murray and Chu, 2015) and (Agatz et al., 2016). Consequently, this gap in the literature provides a motivation for studying TSP-D  
115 with the min-cost objective function.

This paper studies a new variant of TSP-D following the hypotheses of the FSTSP proposed in the work of (Murray and Chu, 2015). In FSTSP, the objective is to minimize the delivery completion time, or in other word the time coming back to the depot, of both truck and drone. In the new variant  
120 that we call min-cost TSP-D, the objective is to minimize the total operational cost of the system including two distinguished parts. The first part is the transportation cost of truck and drone while the second part relates to the waste time a vehicle has to wait for the other whenever drone is launched. In the following, we denote the FSTSP as min-time TSP-D to avoid confusion.

125 In this paper, we propose a MILP model and two heuristics to solve the min-cost TSP-D: a Greedy Randomized Adaptive Search Procedure (GRASP) and a heuristic adapted from the work of (Murray and Chu, 2015) called TSP-LS. In detail, the contributions of this paper are as follows:

- We introduce a new variant of TSP-D called min-cost TSP-D, in which  
130 the objective is to minimize the operational costs.
- We propose a model together with a MILP formulation for the problem which is an extended version of the model proposed in (Murray and Chu, 2015) for min-time TSP-D.
- We develop two heuristics for min-cost TSP-D: TSP-LS and GRASP.  
135 which contain a new split procedure and local search operators. We also adapt our solution methods to solve the min-time problem studied in (Murray and Chu, 2015).

- We introduce various sets of instances with different numbers of customers and a variety of options to test the problem.
- 140 - We conduct various experiments to test our heuristics on the min-cost as well as min-time problems. We also compare solutions of both objectives. The computational results show that GRASP outperforms TSP-LS in terms of quality of solutions with an acceptable running time. TSP-LS delivers solution of lower quality, but very quickly.

145 This article is structured as follows: Section 1 provides the introduction. Section 2 describes the problem and the model. The MILP formulation is introduced in Section 3. We describe our two heuristics in Sections 4 and 5. Section 6 presents the experiments, including instance generations and settings. We discuss the computational results in Section 7. Finally, Section 8  
150 concludes the work and provides suggestions for future research.

## 2. Problem definition

In this section, we provide a description of the problem and discuss a model for the min-cost TSP-D in a step-by-step manner. Here, we consider a list of customers to whom a truck and a drone will deliver parcels. To make  
155 a delivery, the drone is launched from the truck and later rejoins the truck at another location. Each customer is visited only once and is serviced by either the truck or the drone. Both vehicles must start from and return to the depot. When a customer is serviced by the truck, this is called a **truck delivery**, while when a customer is serviced by the drone, this is called a **drone delivery**. This  
160 is represented as a 3-tuple  $\langle i, j, k \rangle$ , where  $i$  is a launch node,  $j$  is a drone node (a customer who will be serviced by the drone), and  $k$  is a rendezvous node, as listed below:

- Node  $i$  is a launch node at which the truck launches the drone. The launching operation must be carried out at a customer location or the  
165 depot. The time required to launch the drone is denoted as  $s_L$ .

- Node  $j$  is a node serviced by the drone, called a "drone node". We also note that not every node in the graph is a drone node. Because some customers might demand delivery a product with size and weight larger than the capacity of the drone.
- 170 • Node  $k$  is a customer location where the drone rejoins the truck. At node  $k$ , the two vehicles meet again; therefore, we call it "rendezvous node". While waiting for the drone to return from a delivery, the truck can make other truck deliveries. The time required to retrieve the drone and prepare for the next drone delivery is denoted as  $s_R$ . Moreover, the  
175 two vehicles can wait for each other at the rendezvous point.

Moreover, the drone has an "endurance", which can be measured as the maximum time the drone can operate without recharging. A tuple  $\langle i, j, k \rangle$  is called feasible if the drone has sufficient power to launch from  $i$ , deliver to  $j$  and rejoin the truck at  $k$ . The drone can be launched from the depot but must  
180 subsequently rejoin the truck at a customer location. Finally, the drone's last rendezvous with the truck can occur at the depot.


When not actively involved in a **drone delivery**, the drone is carried by the truck. Again, as in (Murray and Chu, 2015), we also assume that the drone is in constant flight when waiting for the truck. Furthermore, the truck and  
185 the drone have their own transportation costs per unit of distance. In practice, the drone's cost is much lower than the truck's cost because it weighs much less than the truck, hence, consuming much less energy. In addition, it is not run by gasoline but by batteries. We also assume that the truck provides new fresh batteries for the drone (or recharges its batteries completely) before each  
190 drone delivery begins. When a vehicle has to wait for each other, a penalty is created and added to the transportation cost to form the total operational cost of the system. The waiting costs of truck and drone are calculated by:

$$\text{waiting cost}_{truck} = \alpha \times \text{waiting time}$$

$$\text{waiting cost}_{\text{drone}} = \beta \times \text{waiting time}$$

where  $\alpha$  and  $\beta$  are the waiting fees of truck and drone per unit of time, respectively. The use of these coefficients is flexible to model a number of situations  
195 in reality. Typically,  $\alpha$  can be used to represent parking fee and labour cost of the truck driver, while  $\beta$  can model costs resulted by battery energy consumption of drone. In some contexts where a delivery company does not have to pay waiting costs and wants to focus only on transportation cost, it can set  
200 both coefficients to null. In addition, if we do not allow the waiting of drone to protect it from theft or being shot down by strangers, we can set  $\beta$  to a very large number. Similarly for  $\alpha$ , if we only have a very short time to park the truck at the customer locations.

The objective of the min-cost TSP-D is to minimize the total operational  
205 cost of the system which includes the travel cost of truck and drone as well as their waiting costs. Because the problem reduces to a TSP when the drone's endurance is null, it is NP-Hard. Examples of TSP and min-cost TSP-D optimal solutions on the same instance in which the unitary transportation cost of the truck is 25 times more expensive than that of the drone are shown in  
210 Figure 1.

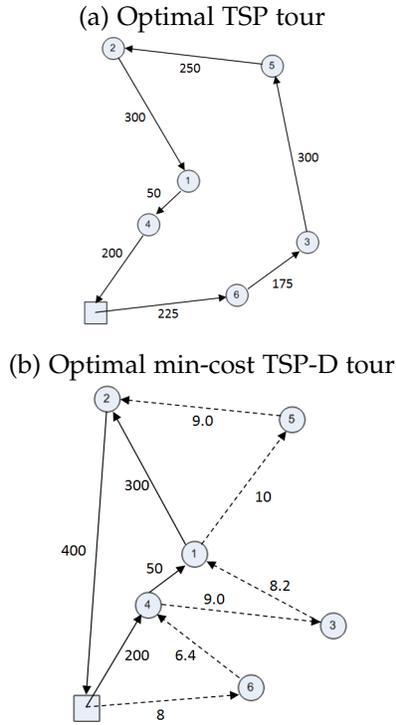

**Figure 1:** Optimal solution: TSP vs. min-cost TSP-D.

*TSP Objective = 1500, min-cost TSP-D Objective = 1000.82. The solid arcs are truck's path. The dash arcs are drone's path*

We now develop the model for the problem. We first define basic notations relating to the graph, sequence and subsequence. Then, we formally define drone delivery and the solution representation as well as the associated constraints and objective.

215 **2.1. The min-cost TSP-D problem**

The min-cost TSP-D is defined on a graph  $G = (V, A)$ ,  $V = \{0, 1, \dots, n, n + 1\}$ , where 0 and  $n + 1$  both represent the same depot but are duplicated to represent the starting and returning points. The set of customers is  $N = \{1, \dots, n\}$ . Let  $V_D \subseteq N$  denote the set of customers that can be served by  
 220 drone. Let  $d_{ij}$  and  $d'_{ij}$  be the distances from node  $i$  to node  $j$  travelled by the

truck and the drone, respectively. We also denote  $\tau_{ij}, \tau'_{ij}$  the travel time of truck and drone from  $i$  to  $j$ . Furthermore,  $C_1$  and  $C_2$  are the transportation costs of the truck and drone, respectively, per unit of distance.

Given a sequence  $s = \langle s_1, s_2, \dots, s_t \rangle$ , where  $s_i \in V, i = 1 \dots t$ , we denote  
 225 the following:

- $V(s) \subseteq V$  the list of nodes of  $s$
- $pos(i, s)$  the position of node  $i \in V$  in  $s$
- $next_s(i), prev_s(i)$  the next node and previous node of  $i$  in  $s$
- $first(s), last(s)$  the first node and last node of  $s$
- 230 -  $s[i]$  the  $i^{th}$  node in  $s$
- $size(s)$  the number of nodes in  $s$
- $sub(i, j, s)$ , where  $\forall i, j \in s, pos(i, s) < pos(j, s)$ , the subsequence of  $s$  from node  $i$  to node  $j$
- $A(s) = \{(i, next_s(i)) | i \in V(s) \setminus last(s)\}$  the set of arcs in  $s$
- 235 -  $d_{i \rightarrow k}$  the distance traveled by truck from  $i$  to  $k$  in the truck tour
- $t_{i \rightarrow k}$  the time traveled by truck from  $i$  to  $k$  in the truck tour
- $t'_{ijk}$  the time traveled by drone from  $i$  to  $j$  to  $k$  in a drone delivery
- $d_{i \rightarrow k}^{-j}$  the distance traveled by truck from  $i$  to  $k$  in the truck tour with  $j$  removed ( $j$  is between  $i$  and  $k$ )

As mentioned above, we define a **drone delivery** as a 3-tuple  $\langle i, j, k \rangle$  :  $i, j, k \in V, i \neq j, j \neq k, k \neq i, \tau'_{ij} + \tau'_{jk} \leq \epsilon$ , where  $\epsilon$  is a constant denoting the drone's endurance. We also denote  $\mathbb{P}$  as the set of all possible drone deliveries on the graph  $G = (V, A)$  that satisfies the endurance constraint as follows:

$$\mathbb{P} = \{\langle i, j, k \rangle : i, k \in V, j \in V_D, i \neq j, j \neq k, k \neq i, \tau'_{ij} + \tau'_{jk} \leq \epsilon\}.$$

240 2.2. Solution representation

A **min-cost TSP-D solution**, denoted as  $sol$ , is represented by two components:

- A truck tour, denoted as  $TD$ , is a sequence  $\langle e_0, e_1, \dots, e_k \rangle$ , where  $e_0 = e_k = 0, e_i \in V, e_i \neq e_j$  and  $i \neq j$ .
- 245 - A set of drone deliveries  $DD$  such that  $DD \subseteq \mathbb{P}$ ,

which can also be written as

$$sol = (TD, DD).$$

2.3. Constraints

A solution  $(TD, DD)$  of the min-cost TSP-D must satisfy the following constraints:

- (A) Each customer must be serviced by either the truck or the drone:

$$\forall e \in N : e \in TD \text{ or } \exists \langle i, e, k \rangle \in DD.$$

250 By definition, during a truck tour, a customer cannot be visited twice by the truck. The above constraint does not prevent a customer from being serviced by both the truck and the drone nor from being serviced twice by the drone.

- (B) A customer is never serviced twice by the drone:

$$\forall \langle i, j, k \rangle, \langle i', j', k' \rangle \in DD : j \neq j'.$$

- (C) Drone deliveries must be compatible with the truck tour:

$$\forall \langle i, j, k \rangle \in DD : j \notin TD, i \in TD, k \in TD, pos(i, TD) < pos(k, TD).$$

This constraint implies that a customer cannot be serviced by both the truck and drone.

(D) No interference between drone deliveries:

$$\forall \langle i, \cdot, k \rangle \in DD, \forall e \in \text{sub}(i, k, TD), \forall \langle i', j', k' \rangle \in DD : e \neq i'.$$

255 The above constraint means that when the drone is launched from the truck for a drone delivery, it cannot be relaunched before the rendezvous from that delivery. As a consequence, we cannot have any other rendezvous during that period either.

#### 2.4. Objective

260 Regarding the costs, the following notations are used:

- $\text{cost}(i, j, k) = C_2(d'_{ij} + d'_{jk})$ , where  $\langle i, j, k \rangle \in \mathbb{P}$  [cost of drone delivery  $\langle i, j, k \rangle$ ]
- $\text{cost}_W^T(i, j, k) = \alpha \times \max(0, (t_{i \rightarrow k} - t'_{ijk}))$ , where  $\langle i, j, k \rangle \in \mathbb{P}$  [waiting cost of truck at  $k$ ]
- 265 -  $\text{cost}_W^D(i, j, k) = \beta \times \max(0, (t'_{ijk} - t_{i \rightarrow k}))$ , where  $\langle i, j, k \rangle \in \mathbb{P}$  [waiting cost of drone at  $k$ ]
- $\text{cost}(TD) = \sum_{(i,j) \in A(TD)} C_1 \cdot d_{ij}$  [cost of a truck tour  $TD$ ]
- $\text{cost}(DD) = \sum_{\langle i,j,k \rangle \in DD} \text{cost}(i, j, k)$  [total cost of all drone deliveries in  $DD$ ]
- $\text{cost}_W(DD) = \sum_{\langle i,j,k \rangle \in DD} \text{cost}_W^T(i, j, k) + \text{cost}_W^D(i, j, k)$  [total waiting cost]
- 270 -  $\text{cost}(TD, DD) = \text{cost}(TD) + \text{cost}(DD) + \text{cost}_W(DD)$  [cost of a solution]
- $\text{cost}(\text{sub}(i, k, s))$  the total cost for both truck and drone and their waiting cost (if any) in a subsequence  $s \in TD$ .

**The objective** is to minimize the total operational cost:

$$\min \text{cost}(TD, DD).$$

### 3. Mixed Integer Linear Programming Formulation

The min-cost TSP-D defined in the previous section is represented here in  
 275 a MILP formulation. This formulation is an extension from the one proposed  
 by Murray and Chu (2015). We extend it by proposing constraints where  
 waiting time is captured in order to calculate the waiting cost of two vehicles.  
 We first define two subsets of  $V$ ,  $V_L = \{0, 1, \dots, n\}$  and  $V_R = \{1, 2, \dots, n + 1\}$   
 to distinguish the nodes that from where the drone can be launched from and  
 280 the one it returns to.

#### Variables

Let  $x_{ij} \in \{0, 1\}$  equal one if the truck goes from node  $i$  to node  $j$  with  
 $i \in V_L$  and  $j \in V_R$ ,  $i \neq j$ . Let  $y_{ijk} \in \{0, 1\}$  equal one if  $\langle i, j, k \rangle$  is a **drone**  
**delivery**. We can denote  $p_{ij} \in \{0, 1\}$  as equalling one if node  $i \in N$  is visited  
 285 before node  $j \in N$ ,  $j \neq i$ , in the truck's path. We also set  $p_{0j} = 1$  for all  $j \in N$   
 to indicate that the truck always starts the tour from the depot. As in standard  
 TSP subtour elimination constraints, we denote  $0 \leq u_i \leq n + 1$  as the position  
 of the node  $i$ ,  $i \in V$  in the truck's path.

To handle the waiting time, let  $t_i \geq 0, t'_i \geq 0, i \in V_R$  denote the arrival  
 290 time of truck and drone at node  $i$ ,  $r_i \geq 0, r'_i \geq 0, i \in V_R$  the leaving time of  
 truck and drone at node  $i$ . We also denote  $w_i \geq 0, w'_i \geq 0, i \in V_R$  the waiting  
 time of truck and drone at node  $i$  respectively. Finally, we have  $t_0 = 0, t'_0 =$   
 $0, r_0 = 0, r'_0 = 0$  the earliest time of truck and drone starting from depot 0 and  
 $w_0 = 0, w'_0 = 0$  the waiting time at the starting depot.

295 **The MILP formulation** is as follows:

$$\begin{aligned}
 \text{Min } C_1 \sum_{i \in V_L} \sum_{\substack{j \in V_R \\ i \neq j}} d_{ij} x_{ij} + C_2 \sum_{i \in V_L} \sum_{\substack{j \in N \\ i \neq j}} \sum_{\substack{k \in V_R \\ \langle i, j, k \rangle \in \mathcal{P}}} (d'_{ij} + d'_{jk}) y_{ijk} \\
 + \alpha \sum_{i \in V} w_i + \beta \sum_{i \in V} w'_i
 \end{aligned} \tag{1}$$

$$\sum_{\substack{i \in V_L \\ i \neq j}} x_{ij} + \sum_{\substack{i \in V_L \\ i \neq j}} \sum_{\substack{k \in V_R \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk} = 1 \quad \forall j \in N \quad (2)$$

$$\sum_{j \in V_R} x_{0j} = 1 \quad (3)$$

$$\sum_{i \in V_L} x_{i,n+1} = 1 \quad (4)$$

$$u_i - u_j + 1 \leq (n+2)(1 - x_{ij}) \quad \forall i \in V_L, j \in \{V_R : i \neq j\} \quad (5)$$

$$\sum_{\substack{i \in V_L \\ i \neq j}} x_{ij} = \sum_{\substack{k \in V_R \\ k \neq j}} x_{jk} \quad \forall j \in N \quad (6)$$

$$2y_{ijk} \leq \sum_{\substack{h \in V_L \\ h \neq i}} x_{hi} + \sum_{\substack{l \in N \\ l \neq k}} x_{lk} \quad (7)$$

$$\forall i \in N, j \in \{N : i \neq j\}, k \in \{V_R : \langle i,j,k \rangle \in \mathbb{P}\}$$

$$y_{0jk} \leq \sum_{\substack{h \in V_L \\ h \neq k \\ h \neq j}} x_{hk} \quad j \in N, k \in \{V_R : \langle 0,j,k \rangle \in \mathbb{P}\} \quad (8)$$

$$u_k - u_i \geq 1 - (n+2) \left(1 - \sum_{\substack{j \in N \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}\right) \quad (9)$$

$$\forall i \in V_L, k \in \{V_R : k \neq i\}$$

$$\sum_{\substack{j \in N \\ j \neq i}} \sum_{\substack{k \in V_R \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk} \leq 1 \quad \forall i \in V_L \quad (10)$$

$$\sum_{\substack{i \in V_L \\ i \neq k}} \sum_{\substack{j \in N \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk} \leq 1 \quad \forall k \in V_R \quad (11)$$

$$u_i - u_j \geq 1 - (n+2)p_{ij} - M\left(2 - \sum_{\substack{h \in V_L \\ h \neq i}} x_{hi} - \sum_{\substack{k \in N \\ k \neq j}} x_{kj}\right) \quad (12)$$

$$\forall i \in N, j \in \{V_R : j \neq i\}$$

$$u_i - u_j \leq -1 + (n+2)(1 - p_{ij}) + M\left(2 - \sum_{\substack{h \in V_L \\ h \neq i}} x_{hi} - \sum_{\substack{k \in N \\ k \neq j}} x_{kj}\right) \quad (13)$$

$$\forall i \in N, j \in \{V_R : j \neq i\}$$

$$u_0 - u_j \geq 1 - (n+2)p_{0j} - M\left(1 - \sum_{\substack{k \in V_L \\ k \neq j}} x_{kj}\right) \quad \forall j \in V_R \quad (14)$$

$$u_0 - u_j \leq -1 + (n+2)(1 - p_{0j}) + M\left(1 - \sum_{\substack{k \in V_L \\ k \neq j}} x_{kj}\right) \quad \forall j \in V_R \quad (15)$$

$$u_l \geq u_k - M\left(3 - \sum_{\substack{j \in N \\ j \neq l \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk} - \sum_{\substack{m \in N \\ m \neq i \\ m \neq k \\ m \neq l}} \sum_{\substack{n \in V_R \\ n \neq i \\ n \neq k \\ \langle l,m,n \rangle \in \mathbb{P}}} y_{lmn} - p_{il}\right) \quad (16)$$

$$\forall i \in V_L, k \in \{V_R : k \neq i\}, l \in \{N : l \neq i, l \neq k\}.$$

$$t_k \geq r_i + \tau_{ik} - M(1 - x_{ik}) \quad \forall i \in V_L, k \in V_R, i \neq j \quad (17)$$

$$t_k \leq r_i + \tau_{ik} + M(1 - x_{ik}) \quad \forall i \in V_L, k \in V_R, i \neq j \quad (18)$$

$$t'_j \geq r_i + \tau'_{ij} - M\left(1 - \sum_{\substack{k \in V_R \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}\right) \quad \forall j \in V_D, i \in V_L, j \neq i \quad (19)$$

$$t'_j \leq r_i + \tau'_{ij} + M\left(1 - \sum_{\substack{k \in V_R \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}\right) \quad \forall j \in V_D, i \in V_L, j \neq i \quad (20)$$

$$t'_k \geq r'_j + \tau'_{jk} - M\left(1 - \sum_{\substack{i \in V_L \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}\right) \quad \forall j \in V_D, k \in V_R, j \neq k \quad (21)$$

$$t'_k \leq r'_j + \tau'_{jk} + M(1 - \sum_{\substack{i \in V_L \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}) \quad \forall j \in V_D, k \in V_R, j \neq k \quad (22)$$

$$t'_j \geq r'_j - M(1 - \sum_{\substack{i \in V_L \\ i \neq j}} \sum_{\substack{k \in V_R \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}) \quad \forall j \in N \quad (23)$$

$$t'_j \leq r'_j + M(1 - \sum_{\substack{i \in V_L \\ i \neq j}} \sum_{\substack{k \in V_R \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}) \quad \forall j \in N \quad (24)$$

$$r_k \geq t_k + s_L \left( \sum_{\substack{l \in N \\ l \neq k}} \sum_{\substack{m \in V_R \\ m \neq l \\ m \neq k}} y_{klm} \right) + s_R \left( \sum_{\substack{i \in V_L \\ i \neq k}} \sum_{\substack{j \in N \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk} \right) \quad (25)$$

$$-M(1 - \sum_{\substack{i \in V_L \\ i \neq k}} \sum_{\substack{j \in N \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}) \quad \forall k \in V_R$$

$$r'_k \geq t'_k + s_L \left( \sum_{\substack{l \in N \\ l \neq k}} \sum_{\substack{m \in V_R \\ m \neq l \\ m \neq k}} y_{klm} \right) + s_R \left( \sum_{\substack{i \in V_L \\ i \neq k}} \sum_{\substack{j \in N \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk} \right) \quad (26)$$

$$-M(1 - \sum_{\substack{i \in V_L \\ i \neq k}} \sum_{\substack{j \in N \\ \langle i,j,k \rangle \in \mathbb{P}}} y_{ijk}) \quad \forall k \in V_R$$

$$r'_k - (r'_j - \tau'_{ij}) - s_L \left( \sum_{\substack{l \in N \\ l \neq i \\ l \neq j \\ l \neq k}} \sum_{\substack{m \in V_R \\ m \neq k \\ m \neq i \\ m \neq l}} y_{klm} \right) \leq \epsilon + M(1 - y_{ijk}) \quad (27)$$

$$\langle k,l,m \rangle \in \mathbb{P}$$

$$\forall k \in V_R, j \in C, j \neq k, i \in V_R, \langle i,j,k \rangle \in \mathbb{P}$$

$$w_k \geq 0 \quad \forall k \in V_R \quad (28)$$

$$w'_k \geq 0 \quad \forall k \in V_R \quad (29)$$

$$w_k \geq t'_k - t_k \quad \forall k \in V_R \quad (30)$$

$$w'_k \geq t_k - t'_k \quad \forall k \in V_R \quad (31)$$

$$w_0 = 0, w'_0 = 0, t_0 = 0, t'_0 = 0, r_0 = 0, r'_0 = 0 \quad (32)$$

$$r_i = r'_i \quad \forall i \in V \quad (33)$$

$$x_{ij} \in \{0, 1\} \quad \forall i \in V_L, j \in V_R, j \neq i \quad (34)$$

$$y_{ijk} \in \{0, 1\} \quad \forall i \in V_L, j \in N, k \in V_R, i \neq j, j \neq k, i \neq k, \langle i, j, k \rangle \in \mathbb{P} \quad (35)$$

$$p_{ij} \in \{0, 1\} \quad \forall i, j \in N, i \neq j \quad (36)$$

$$p_{0j} = 1 \quad \forall j \in N \quad (37)$$

$$0 \leq u_i \leq n + 1 \quad \forall i \in V \quad (38)$$

$$t_i \geq 0 \quad \forall i \in V \quad (39)$$

$$t'_i \geq 0 \quad \forall i \in V \quad (40)$$

$$r_i \geq 0 \quad \forall i \in V \quad (41)$$

$$r'_i \geq 0 \quad \forall i \in V \quad (42)$$

The objective is to minimize the operational costs. We now explain the constraints. The letter in parenthesis at the end of each bullet item, if any, denotes the association between a MILP constraint and a constraint described in the model:

- 300 • Constraint 2 guarantees that each node is visited once by either a truck or a drone. **(A)**
- Constraints 3 and 4 state that the truck must start from and return to the depot. **(Modelling TD)**
- Constraint 5 is a subtour elimination constraint. **(Modelling TD)**
- 305 • Constraint 6 indicates that if the truck visits  $j$  then it must depart from  $j$ . **(Modelling TD)**
- Constraint 7 associates a drone delivery with the truck route. In detail, if we have a drone delivery  $\langle i, j, k \rangle$ , then there must be a truck route between  $i$  and  $k$ . **(C)**

- 310 • Constraint 8 indicates that if the drone is launched from the depot, then the truck must visit  $k$  to collect it. **(C)**
- Constraint 9 ensures that if there is a drone delivery for  $\langle i, j, k \rangle$ , then the truck must visit  $i$  before  $k$ . **(C)**
- 315 • Constraints 10 and 11 state that each node in  $V_L$  or  $V_R$  can either launch the drone or retrieve it at most once, respectively. **(B)**
- Constraints 12, 13, 14 and 15 ensure that if  $i$  is visited before  $j$  in the truck route, then its ordering constraint must be maintained. **(D)**
- Constraint 16, if we have two drone deliveries  $\langle i, j, k \rangle$  and  $\langle l, m, n \rangle$  and  $i$  is visited before  $l$ , then  $l$  must be visited after  $k$ . This constraint avoids the problem of launching a drone between  $i$  and  $k$ . **(D)**
- 320 • Finally, constraints 17 to 33 ensure that waiting time and endurance is correctly handled. **(E)**

#### 4. A Greedy Randomized Adaptive Search Procedure (GRASP) for TSP-D

This section presents a Greedy Randomized Adaptive Search Procedure (GRASP) Gendreau and Potvin (2010) to solve the min-cost TSP-D. We also adapt our split procedure to solve the min-time TSP-D. In the construction step, we propose a split algorithm that builds a min-cost TSP-D solution from a TSP solution. In the local search step, new operators adapted from the traditional ones are introduced for the min-cost TSP-D. The general outline of our GRASP is shown in Algorithm 1. More specifically, in each iteration, it first generates a TSP tour using a TSP construction heuristic (line 7). In this paper, we use three heuristics to generate giant tours as follows:

- 335 • *k-nearest neighbour*: This heuristic is inspired from the well-known nearest neighbour algorithm for solving the TSP. It starts from the depot, repeatedly visits the node  $v$  which is randomly chosen among  $k$  closest unvisited nodes.

- *k-cheapest insertion*: The approach is to start with a subtour, i.e., a small tour with a subset of nodes, and then extend this tour by repeatedly inserting the remaining nodes until no more node can be added. The unvisited node  $v$  to be inserted and its insertion location between two consecutive nodes  $(i, j)$  of the tour are selected so that this combination gives the least Insertion Costs (IC). This cost is calculated by:

$$IC = d_{iv} + d_{vj} - d_{ij} \quad (43)$$

To create the randomness for the heuristic, at each insertion step we randomly choose a pair of an unvisited node and its insertion location among  $k$  pairs which provides the best insertion costs. The starting subtour includes only the depot.

- *random insertion*: This heuristic works similarly to the  $k$ -nearest neighbour but it iteratively chooses a random node  $v$  among all unvisited nodes.

---

**Algorithm 1:** Greedy Randomized Adaptive Search Procedure (GRASP)

for min-cost TSP-D

**Result:**  $bestSolution$ 

```
1  $bestSolution = null$  ;
2  $bestObjectiveValue = \top$  ;
3  $randomGenerator = \text{initialize TSP tour random generator}$  ;
4  $iteration = 0$  ;
5 while  $iteration < n_{TSP}$  do
350 |    $iteration = iteration + 1$  ;
7 |    $tour = \text{generate a random TSP tour using } randomGenerator$  ;
8 |    $(P,V,T) = \text{Split\_Algorithm\_Step1}(tour)$  ;
9 |    $tspdSolution = \text{Split\_Algorithm\_Step2}(P, V, T)$  ;
10 |   $tspdSolution = \text{Local\_Search}(tspdSolution)$  ;
11 |  if  $f(tspdSolution) < bestObjectiveValue$  then
12 |     $bestSolution = tspdSolution$  ;
13 |     $bestObjectiveValue = f(tspdSolution)$  ;
14 return  $bestSolution$  ;
```

---

In the next step, we construct a min-cost TSP-D solution using the split algorithm (line 8 and 9) and then improve it by local search (line 10). The best solution found is also recorded during the processing of the tours (lines 11 to 13). The algorithm stops after  $n_{TSP}$  iterations. The detailed implementation of the split algorithm is described in Algorithms 2 and 3.

#### 4.1. A Split Algorithm for min-cost TSP-D

Given a TSP tour, the split procedure algorithm selects nodes to be visited by the drone to obtain a solution for the min-cost TSP-D, assuming that the relative order of the nodes is fixed. Other split procedures are now used widely in state-of-the-art metaheuristics such as Prins et al. (2009), Vidal et al. (2013), Vidal et al. (2014), Cattaruzza et al. (2014) to solve many variants of VRPs. We start from a given TSP tour  $s = (s_0, s_1, \dots, s_{n+1})$  and must convert this tour into a feasible min-cost TSP-D solution. This is accomplished by removing

nodes from the truck tour and substituting drone deliveries for those nodes.

365 There are two main steps in the split algorithm: auxiliary graph construction and solution extraction. The pseudo code for these is listed in Algorithms 2 and 3, respectively. The most important step of the split algorithm is the construction of the auxiliary graph, in which each subsequence of nodes  $(s_i, \dots, s_k)$  can be turned into a drone delivery such that  $s_i$  is the launch node,  $s_k$  is the rendezvous node and  $s_j$ , where  $pos(s_i, s) < pos(s_j, s) < pos(s_k, s)$ , is the drone node. We now describe the split algorithm in detail.

370

---

**Algorithm 2:** Split\_Algorithm\_Step1(s): Building the auxiliary graph and finding shortest path

---

**Data:** TSP tour  $s$

**Result:**  $P$  stores the shortest path from the auxiliary graph,  $V$  is the cost of that shortest path, and  $T$  is a list of the possible drone deliveries and costs

```

1 arcs =  $\emptyset$  ;
2 T =  $\emptyset$  ;
3 /* Auxiliary graph construction - Arcs */
4 foreach i in s \ last(s) do
5     k = pos(i, s) + 1 ;
6     arcs = arcs  $\cup$  (i, k, cost(i, k, s))
7 foreach i in s \ { last(s), s[pos(last(s), s) - 1] } do
8     foreach k in s : pos(k, s)  $\geq$  pos(i, s) + 2 do
9         minValue =  $\infty$  ;
10        minIndex =  $\infty$  ;
11        foreach j in s : pos(i, s) < pos(j, s) < pos(k, s) do
12            if  $\langle i, j, k \rangle \in \mathbb{P}$  then
13                cost = cost(sub(i, k, s)) +  $C_1$  ( $d_{prev_s(j)next_s(j)} - d_{prev_s(j),j} -$ 
14                     $d_{j,next_s(j)}$ ) + cost(i, j, k) +  $cost_W^T(i, j, k)$  +  $cost_W^D(i, j, k)$  ;
15                if cost < minValue then
16                    minValue = cost ;
17                    minIndex = pos(j, s) ;
18            arcs = arcs  $\cup$  {(i, k, minValue)} ;
19            if minIndex  $\neq$   $\top$  then
20                T = T  $\cup$  {(i, s[minIndex], k, minValue)} ;
21 /* Finding the shortest path */
22 V[0] = 0 ;
23 P[0] = 0 ;
24 foreach k in s \ { 0 } do
25     foreach (i, k, cost)  $\in$  arcs do
26         if V[k] > V[i] + cost then
27             V[k] = V[i] + cost ;
28             P[k] = i ;
29 return (P, V, T) ;

```

---

*Building the auxiliary graph and finding shortest path.* In Algorithm 2, we construct an auxiliary weighted graph  $H = (V', A')$  based on the TSP tour  $s$  of the graph  $G = (V, A)$ . We have  $V' = V$  and an arc  $(i, j) \in A'$  that represents a subroute from  $i$  to  $j$ , where  $pos(i, s) < pos(j, s)$ .

If  $i$  and  $j$  are adjacent nodes in  $s$ , then the cost  $c_{ij}$  of arc  $(i, j) \in A'$  is calculated directly as follows:

$$c_{ij} = C_1 d_{ij}. \quad (44)$$

However, when  $i$  and  $k$  are not adjacent and a node  $j$  exists between  $i$  and  $k$  such that  $\langle i, j, k \rangle \in \mathbb{P}$ , then

$$c_{ik} = \min_{\langle i, j, k \rangle \in \mathbb{P}} \text{cost}(\text{sub}(i, k, s)) + C_1 \left( d_{\text{prev}_s(j), \text{next}_s(j)} - d_{\text{prev}_s(j), j} - d_{j, \text{next}_s(j)} \right) + \text{cost}(i, j, k) + \text{cost}_W^T(i, j, k) + \text{cost}_W^D(i, j, k). \quad (45)$$

If  $i$  and  $k$  are not adjacent and no node  $j$  exists between  $i$  and  $k$  such that  $\langle i, j, k \rangle$  could be a **drone delivery**, then

$$c_{ik} = +\infty. \quad (46)$$

The arc's cost calculation is shown in lines 1 to 19 in Algorithm 2. Moreover, in lines 18 and 19, we store the list of possible **drone deliveries**  $T$ . This list will be used in the extraction step.


The auxiliary graph is used to compute the cost  $v_k$  of the shortest path from the depot to node  $k$ . Because the graph  $H$  is a directed acyclic graph, these values can be computed easily using a dynamic programming approach. Moreover, an arc  $(i, k)$  in the shortest path that does not belong to the initial TSP tour means that a drone delivery can be made where  $i$  is the launch node,  $k$  is the rendezvous node, and the delivery node is a node between  $i$  and  $k$  in the TSP tour. This computation ensures that no interference occurs between the chosen drone deliveries. We therefore obtain the best solution from the TSP tour while respecting the relative order of the nodes.

In detail, given  $v_0 = 0$ , the value  $v_k$  of each node  $k \in V' \setminus \{0\}$  is then

calculated by

$$v_k = \min\{v_i + c_{ik} : (i,k) \in A'\} \quad \forall k = 1, 2, \dots, n + 1. \quad (47)$$

We also store the shortest path from 0 to  $n + 1$  in  $P(j)$ , where  $j = 1 \dots n + 1$ ;   
 400  $j$  is the node, and the value  $P(j)$  is the previous node of  $j$ . These steps are described in lines 21 to 27 in Algorithm 2. An auxiliary graph for Figure 1 is shown in Figure 2

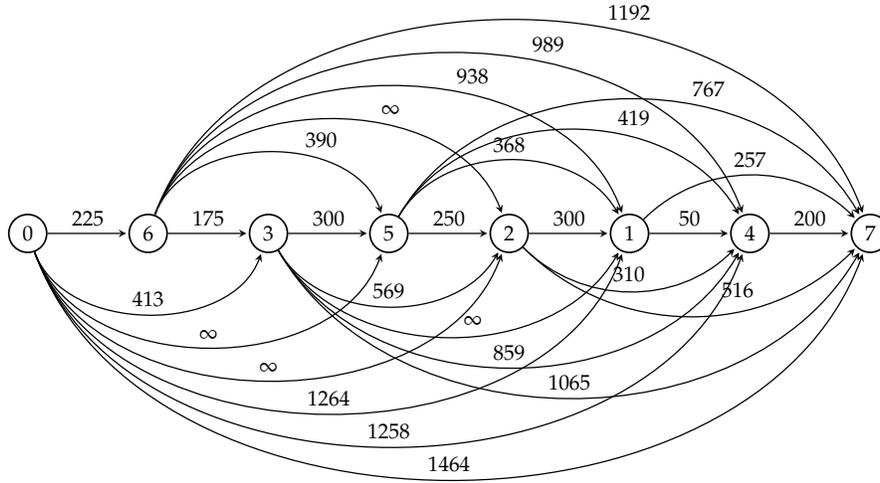

**Figure 2:** Auxiliary graph for TSP tour in Figure 1

The cost computation for each arc in the graph  $H$  can be done in  $\mathcal{O}(n^2)$ . Since  $H$  is acyclic by construction, to search for a shortest path, a breadth-   
 405 first search (BFS) algorithm for directed acyclic graphs can be used, with an  $\mathcal{O}(|A|)$  complexity where  $|A|$  is the number of arcs in the graph. Because the number of arcs in  $H$  is proportional to  $n^2$ , the search for a shortest path in graph  $H$  can be done in  $\mathcal{O}(n^2)$ . Several Split procedures in the literature work in a similar manner (see Prins (2004), Prins (2009) for example). Therefore, we   
 410 get the complexity of the Algorithm 2 in  $\mathcal{O}(n^4)$ .

*Extracting min-cost TSP-D solution.* Given  $P(j), j = 1 \dots n + 1$  defined as above and a list of possible **drone deliveries**  $T$ , we now extract the min-cost TSP-D solution in Algorithm 3. In the first step, given  $P$ , we construct a sequence of nodes  $S_a = 0, n_1, \dots, n + 1$  representing the path from 0 to  $n + 1$  in the  
415 auxiliary graph (lines 2 to 9). Each two consecutive nodes in  $S_a$  are a subroute of the complete solution. However, they might include a **drone delivery**; consequently, we need to determine which node might be the drone node in the subroute, which is computed in  $T$ .

The second step is to construct a min-cost TSP-D solution. To do that, we  
420 first initialize two empty sets: a set of drone deliveries  $S_d$  and a set representing the truck's tour sequence  $S_t$  (lines 11 and 12). We now build these sets one at a time.

For drone delivery extractions, we consider each pair of adjacent positions  $i$  and  $i + 1$  in  $P_{new}$  and determine the number of in-between nodes. If there  
425 is at least one  $j$  node between the  $i$  and  $i + 1$  positions in the TSP tour, we will choose the drone delivery in  $T$  with the minimum value, taking its drone node  $j$  as the result (lines 14 to 17).

To extract the truck's tour (line 19 to 26), we start from the depot 0 in  $S_a$ . Each pair  $i, i + 1 \in S_a$  is considered as a subroute in the min-cost TSP-D so-  
430 lution by taking the nodes from  $i$  to  $i + 1$  in the TSP solution. However, in cases where  $i$  and  $i + 1$  are launch and rendezvous nodes of a **drone delivery**, respectively,  $\langle i, j, i + 1 \rangle$ ,  $j$  must not be considered in the truck's tour.

---

**Algorithm 3:** Split\_Algorithm\_Step2(P,V,T): Extract\_TSPD\_Solution

---

**Data:** P stores the path in the auxiliary graph, V is the cost of the path in P, T is the list of drone deliveries + costs, and *tspTour* is the truck-only TSP tour

**Result:** *tspdSolution*

```
1 /* Construct the sequence of nodes representing the path stored in P */
2 j = n + 1 ;
3 i = ∞ ;
4 Sa = ⟨ j ⟩ ;
5 while i ≠ 0 do
6     i = P[j] ;
7     Sa = Sa::⟨i⟩ ;
8     j = i ;
9 Sa = Sa.reverse() ;
10 /* Create a min-cost TSP-D solution from Sa */
11 Sd = ⟨ ⟩ ;
12 St = ⟨ ⟩ ;
13 /* Drone deliveries */
14 for i = 0; i < Sa.size - 1; i++ do
15     if between Sa[i] and Sa[i + 1] in tspTour, there is at least one node then
16         ndrone = obtain the associated drone node in tuples T ;
17         Sd = Sd ∪ ⟨ Sa[i], ndrone, Sa[i + 1] ⟩ ;
18 /* Truck tour */
19 currentNode = 0 ;
20 while currentNode ≠ n + 1 do
21     if currentNode is a launch node of a tuple t in Sd then
22         St = St :: ⟨ all the nodes from the currentNode to the return node
23             of t in tspTour except the drone node ⟩ ;
24         currentNode = the return node of t ;
25     else
26         St = St :: ⟨ currentNode ⟩ ;
27         currentNode = tspTour[indexOf(currentPosition) + 1] ;
28 tspdSolution = (St, Sd) ;
29 return tspdSolution ;
```

---

435 *Split procedure adaptation for min-time TSP-D.* To deal with the min-time problem, we change the way the arc's costs are computed in the auxiliary graph as follows: If  $i$  and  $j$  are adjacent nodes in  $s$ , then the cost  $c_{ij}$  is calculated by:

$$c_{ij} = \tau_{ij} \quad (48)$$

When  $i$  and  $k$  are not adjacent and a node  $j$  exists between  $i$  and  $k$  such that  $\langle i, j, k \rangle \in \mathbb{P}$ , then

$$c_{ik} = \min_{\langle i, j, k \rangle \in \mathbb{P}} (\max(\text{time}_T(i \rightarrow k), \text{time}_D(i, j) + \text{time}_D(j, k)) + s_R + s_L). \quad (49)$$

440 where  $\text{time}_T(i \rightarrow k)$  is the travel time of truck from launch point  $i$  to rendezvous point  $j$  and  $\text{time}_D(i, j)$  is the travel time of drone from  $i$  to  $j$ . Eventually, this modification results in a change of Algorithm 2, specifically, line 13 to 15 as follows:

---

**Algorithm 4:** Split\_Algorithm\_Step1(s): Min-time adaptation

---

```

1 ...
2 timeDrone = timeD(i, j) + timeD(j, k);
3 timeTruck = timeT(i → k);
4 if max(timeTruck, timeDrone) + sR + sL < minValue then
5   |   minValue = max(timeTruck, timeDrone) + sR + sL ;
6   |   ...

```

---

#### 445 4.2. Local search operators

Two of our local search operators are inspired from the traditional move operators Two-exchange and Relocation Kindervater and Savelsbergh (1997). In addition, given the characteristics of the problem, we also develop two new move operators, namely, "drone relocation", which is a modified version  
450 of the classical relocation operator, and "drone removal", which relates to the removal of a drone node. In detail, from a min-cost TSP-D solution  $(TD, DD)$ , we denote the following:

-  $N_T(TD, DD) = \{e : e \in TD, \langle e, \cdot, \cdot \rangle \notin DD, \langle \cdot, \cdot, e \rangle \notin DD\}$  is the set of  
**truck-only nodes** in the solution  $(TD, DD)$  that are not associated with  
455 any drone delivery

-  $N_D(TD, DD) = \{e : \langle \cdot, e, \cdot \rangle \in DD\}$  is the set of **drone nodes** in the solution  $(TD, DD)$

We now describe each operator.

*Relocation*: This is the traditional relocation operator with two differences:

460 (1) We consider only truck-only nodes; (2) we only relocate into a new position in the truck's tour. An example is shown in Figure 3. In detail, we denote

$$relocate_T((TD, DD), a, b), a \in N_T((TD, DD)), b \in TD, b \neq a, b \neq 0 \quad (50)$$

as the operator that—in effect—relocates node  $a$  before node  $b$  in the truck tour.

*Drone relocation*: The original idea of this operator is that it can change

465 a truck node to a drone node or relocate an existing drone node so that it has different launch and rendezvous locations. The details are as follows: (1) We consider both truck-only and drone nodes; (2) each of these nodes is then relocated as a drone node in a different position in the truck's tour. This move operator results in a neighbourhood that might contain more **drone**  
470 **deliveries**; hence, it has more possibilities to reduce the cost. An example is shown in Figure 4. More precisely, we denote

$$relocate_D((TD, DD), a, i, k) \quad (51)$$

$$a \in N_T((TD, DD)) \cup N_D((TD, DD)), i, k \in TD \setminus \{a\}, i \neq k,$$

$$pos(i, TD) < pos(k, TD), \langle i, a, k \rangle \in \mathbb{P}$$

as the operator procedure, where  $a$  is the node to be relocated and  $i$  and  $k$  are  
475 two nodes in  $TD$ . There are two possibilities for effects: (1) If  $a$  is a truck-only node, this move creates a new drone delivery  $\langle i, a, k \rangle$  in  $DD$  and removes  $a$  from  $TD$ ; (2) if  $a$  is a drone node, the move changes the drone delivery  $\langle \cdot, a, \cdot \rangle \in DD$  to  $\langle i, a, k \rangle$ .

*Drone removal:* In this move operator, we choose a drone node  $j \in N_D$  and  
 480 replace the drone delivery by a truck delivery. An example is shown in Figure  
 5. In detail, we denote

$$remove_D((TD, DD), j, k), j \notin TD, \langle \cdot, j, \cdot \rangle \in DD, k \in TD, k \neq \{0\} \quad (52)$$


as the operator procedure, where  $j$  is the drone node to be removed and  $k$  is  
 a node in  $TD$  such that  $j$  will be inserted before  $k$ . As a result, we have a new  
 solution in which the number of nodes in  $TD$  has been increased by one and  
 485  $DD$ 's cardinality has been decreased by one.

*Two-exchange:* We exchange the position of two nodes. There are three  
 possibilities: (1) When the exchanged nodes are both drone nodes, we make  
 the change in the drone delivery list; (2) when the exchanged nodes are both  
 truck nodes, we first exchange their positions in the truck sequence and then  
 490 apply changes in the drone delivery list; and (3) when the exchanged nodes  
 are a truck node and a drone node, we remove the old tuple and create a  
 new one with the exchanged node. Next, we update the truck sequence and  
 apply the changes to the tuples if the truck node is associated with any drone  
 delivery. An example is shown in Figure 6. In detail, we denote


$$two\_exchange((TD, DD), a, b), a, b \in V \setminus \{0, n + 1\}, a \neq b \quad (53)$$

495 as the operator procedure, where  $a$  and  $b$  are the two nodes to be exchanged.  
 We then swap their positions. The three swap possibilities are as follows: (1)  
 a drone node with a node in  $TD$ ; (2) two drone nodes; and (3) two nodes in  
 $TD$ .


To ensure the feasibility of resulting solutions, we only accept the moves  
 500 which satisfy the constraints of the problem. And finally, our local search  
 operators are easily adapted to deal with the min-time objective. They work  
 on the travel time instead of the travel cost of each arc. Whenever there is a  
 need to update a travel time of a drone delivery, we need to take the greater  
 value between travel times of drone and truck instead of the summation. The  
 505 mechanism of the rest of the local search then stays untouched.

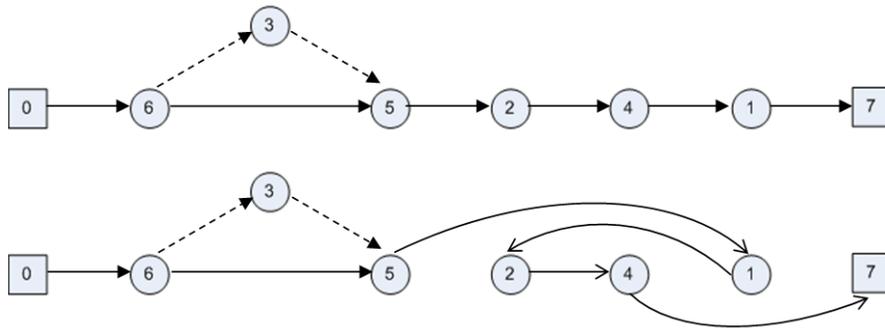

**Figure 3:** A truck relocation move operator :  $relocate_T((TD, DD), 1, 2)$

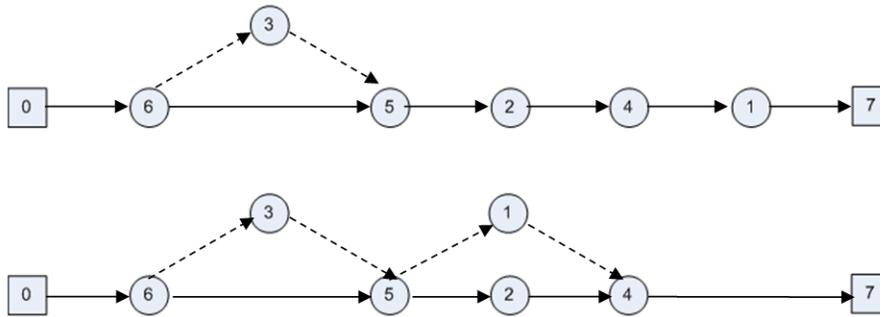


**Figure 4:** A drone relocation move operator :  $relocate_D((TD, DD), 1, 5, 4)$

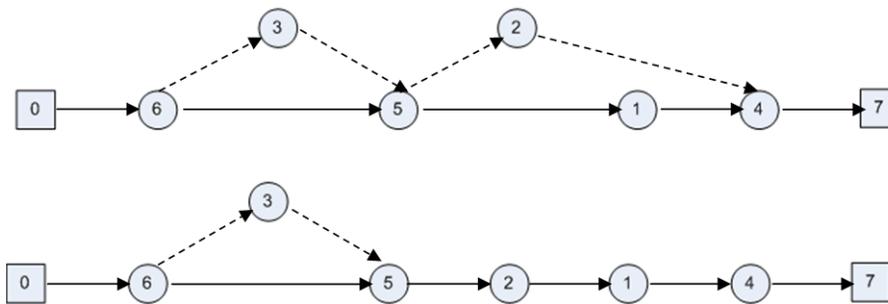

**Figure 5:** A drone removal move operator :  $remove_D((TD, DD), 2)$

### 5. TSP-LS heuristic

The TSP-LS algorithm is adapted from the work of Murray and Chu (2015) to solve the min-cost TSP-D. The differences between min-time FSTSP and the

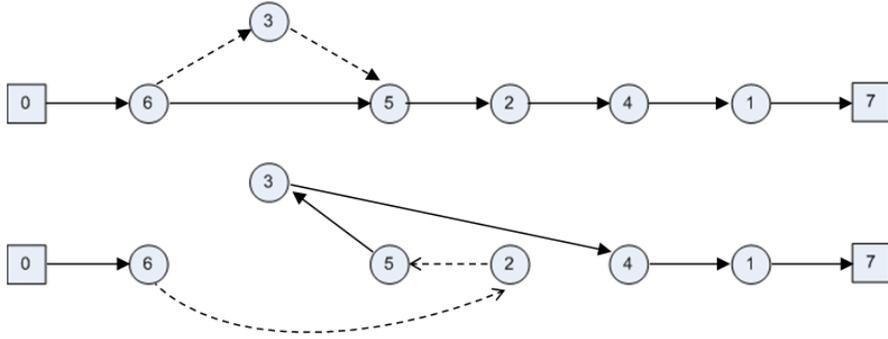

**Figure 6:** A two-exchange move operator in which a drone node is exchanged with a truck node  
:  $two\_exchange((TD, DD), 3, 2)$

adapted min-cost TSP-LS are at the calculation of cost savings (Algorithm 6),  
510 the cost of relocating a truck node to another position (Algorithm 7) and the  
cost of inserting a node as a drone node between two nodes in the truck tour  
(Algorithm 8). These changes are not only about the unit of measurement  
(time vs. cost) but also the waiting cost of two vehicles. We now describe the  
algorithm in details.

515 The algorithm starts by calculating a TSP tour and then repeatedly re-  
locates customers until no more improvement can be reached. The outline  
is shown in Algorithm 5. Lines 1–8 define the global variables, which are  
 $Customers = [1, 2, \dots, n]$ , the sequence of truck nodes— $truckRoute$ , and an  
indexed list  $truckSubRoutes$  of smaller sequences that represent the subroutes  
520 in  $truckRoute$ . The distinct combination of elements in  $truckSubRoutes$  must  
be equal to  $truckRoute$ . We define  $i^*, j^*, k^*$ , where  $j^*$  is the best candidate  
for relocation and  $i^*$  and  $k^*$  denote the positions between which  $j^*$  will be  
inserted. We also store  $maxSavings$  which is the cost improvement value of  
this relocation. The two Boolean variables  $isDroneNode$  and  $Stop$  respectively  
525 determine whether a node in a subroute is a drone node and whether TSP-  
LS should terminate. These global variables are updated during the itera-  
tions, and the heuristic terminates when no more positive  $maxSavings$  can be  
achieved ( $maxSavings = 0$ ).

---

**Algorithm 5:** TSP-LS heuristic

---

**Data:** truck-only sequence  $truckRoute$

**Result:** TSP-D solution  $sol$

```
1  $Customers = N$  ;
2  $truckRoute = solveTSP(N)$ ;
3  $truckSubRoutes = \{truckRoute\}$ ;
4  $sol = (truckRoute, \emptyset)$ ;
5  $i^* = -1$ ;
6  $j^* = -1$ ;
7  $k^* = -1$ ;
8  $maxSavings = 0$ ;
9  $isDroneNode = null$ ;
10  $Stop = false$ ;
11 repeat
12   foreach  $j \in Customers$  do
13      $savings = calcSavings(j)$  ;
14     foreach  $subroute$  in  $truckSubRoutes$  do
15       if  $drone(subroute, sol)$  then
16          $(isDroneNode, maxSavings, i^*, j^*, k^*) =$ 
17            $relocateAsTruck(j, subroute, savings)$ ;
18       else
19          $(isDroneNode, maxSavings, i^*, j^*, k^*) =$ 
20            $relocateAsDrone(j, subroute, savings)$ ;
21     if  $maxSavings > 0$  then
22        $(sol, truckRoute, truckSubRoutes, Customers) =$ 
23          $applyChanges(isDroneNode, i^*, j^*, k^*,$ 
24            $sol, truckRoute, truckSubRoutes, Customers)$ ;
25        $maxSavings = 0$  ;
26   else
27      $Stop = true$ ;
28 until  $Stop$ ;
29 return  $truckSubRoutes$ ;
```

530

For an additional notation used in Algorithm 5, line 15, given a solution  $(TD, DD)$ , we denote  $drone(s, (TD, DD)) \in \{True, False\}$  as *True* if the subsequence  $s$  in  $TD$  is associated with a drone:

$$drone(s, (TD, DD)) = \begin{cases} True & \text{if } \exists j \in V(s), j \neq first(s), \\ & j \neq last(s) : \langle first(s), j, last(s) \rangle \in DD; \\ False & \text{if } \forall j \in V(s), j \neq first(s), \\ & j \neq last(s) : \langle first(s), j, last(s) \rangle \notin DD. \end{cases}$$

In detail, each iteration has two steps: (1) Consider each customer in  
535 *Customers* to determine the best candidate for relocation along with its new position and the cost savings. (2) If the candidate relocation can improve the current solution, then relocate the customer by updating *truckRoute* and *truckSubRoutes* and remove it from *Customers* so that it will not be considered in future iterations; otherwise (when the candidate relocation cannot improve  
540 the current solution), the relocation terminates. We now explain each step and its implementations in Algorithms 5, 6, 7, 8, 9.

Step 1 of the iteration is presented from lines 12 to 18 in Algorithm 5. It first considers each customer  $j$  (line 12) and then calculates the cost savings by removing  $j$  from its current position (line 13). The calculation is shown  
545 in Algorithm 6. Next, line 14 considers each subroute in *truckSubRoute* as a possible target for the relocation of  $j$ . When the current considered subroute is a **drone delivery** (line 15), we then try to relocate  $j$  into this subroute as a truck node (line 16); otherwise, we try to relocate  $j$  as a drone node to create a new **drone delivery** (line 18). The relocation analyses of  $j$  as a truck node or  
550 a drone node are presented in Algorithms 7 and 8, respectively.

---

**Algorithm 6:** calcSavings(j)

---

**Data:**  $j$  : a customer currently assigned to the truck

**Result:** Solution

```
1  $i = prev_{truckRoute}(j)$  ;
2  $k = next_{truckRoute}(j)$  ;
3  $savings = (d_{i,j} + d_{j,k} - d_{i,k})C_1$  ;
4 if  $j$  is associated with a drone delivery in subroute  $s$  then
5    $i = first(s)$  ;
6    $k = last(s)$  ;
7    $w = \alpha \times max(0, t_{i \rightarrow k} - \tau_{ij} - \tau_{jk} + \tau_{ik} - t'_{ijk})$  ;
8    $w' = \beta \times max(0, t'_{ijk} - (t_{i \rightarrow k} - \tau_{ij} - \tau_{jk} + \tau_{ik}))$  ;
9    $savings = savings + w + w'$ 
10 return  $savings$  ;
```

---

In Algorithm 7, we aim to find the best position in subroute  $s$  to insert the current customer under consideration  $j$  by checking each pair of adjacent nodes  $i$  and  $k$  in  $s$  (line 3). After that, if the cost of inserting  $j$  in this position is less than the current  $savings$ , then relocating  $j$  here results in some savings (line 5). Furthermore, because this subroute has a **drone delivery**, we need to check whether inserting  $j$  into it still lies within the drone's power limit so that the truck can still pick up the drone (line 6). Finally, if the cost saved is below the best known  $maxSavings$ , we apply the changes to this location by updating the values of  $isDroneNode, i^*, j^*, k^*$  and  $maxSavings$  (lines 7 to 10).

---

**Algorithm 7:** `relocateAsTruck(j, subroute, savings)`—Calculates the cost of relocating the customer  $j$  into a different position in the truck’s route

---

**Data:**

$j$  : current customer under consideration

$s$  : current subroute under consideration

$savings$  : savings that occur if  $j$  is removed from its current position

**Result:** Updated  $i^*, j^*, k^*, isDroneNode$

```

1  $a = first(s)$  ;
2  $b = last(s)$  ;
3 foreach  $(i, k) \in A(s)$  do
4    $\Delta = (d_{i,j} + d_{j,k} - d_{i,k})C_1$  ;
5   if  $\Delta < savings$  then
6     if the drone is still feasible to fly then
7       if  $savings - \Delta > maxSavings$  then
8          $isDroneNode = False$ ;
9          $j^* = j; i^* = i; k^* = k$ ;
10         $maxSavings = savings - \Delta$ ;
11 return  $(isDroneNode, maxSavings, i^*, j^*, k^*)$ ;

```

---

In Algorithm 8, we consider the relocation of a customer  $j$  in a subroute  $s$  that does not have **drone delivery**. The objective is simple: try to make  $j$  become the drone node of this subroute to reduce the cost. Hence, we consider each pair of  $i$  and  $k$  in  $s$ , where  $i$  precedes  $k$  (line 1, 2), and check whether  $\langle i, j, k \rangle$  could be a viable **drone delivery** (line 3). We then calculate the cost of this change in lines 4–6. Next, we check whether the relocation is better than the best known  $maxSavings$  in line 7. Finally, we update the relocation information in lines 8–10 as in Algorithm 7

---

**Algorithm 8:** `relocateAsDrone(j, subroute, savings)` - Calculates the cost of relocating customer  $j$  as a drone node

---

**Data:**

$j$  : current considered customer

$s$  : current considered subroute

$savings$  : current savings if  $j$  is removed from its position

**Result:** Updated  $i^*, j^*, k^*, isDroneNode$

```

1 for  $i = 0$  to  $size(s) - 2$  do
2   for  $k = i + 1$  to  $size(s) - 1$  do
3     if  $\langle s[i], j, s[k] \rangle \in \mathbb{P}$  then
4        $w_k$  = waiting cost of truck at  $k$  if  $j$  is drone node ;
5        $w'_k$  = waiting cost of drone at  $k$  if  $j$  is drone node ;
6        $\Delta = (d'_{s[i],j} + d'_{j,s[k]})C_2 + w_k + w'_k$  ;
7       if  $savings - \Delta > maxSavings$  then
8          $isDroneNode = True$ ;
9          $j^* = j; i^* = s[i]; k^* = s[k]$ ;
10         $maxSavings = savings - \Delta$ ;
11 return ( $isDroneNode, maxSavings, i^*, j^*, k^*$ );

```

---

In step 2 of the iteration in Algorithm 9, when any cost reduction exists ( $maxSavings \neq 0$ ), we apply the changes based on the current values of  $i^*, j^*, k^*$ , and  $isDroneNode$ . If  $isDroneNode = True$ , we relocate  $j^*$  between  $i^*$  and  $k^*$  as a drone node, forming a **drone delivery** (line 1 to 5). Otherwise,  $j^*$  is inserted as a normal truck node (line 6 to 8). More specifically, these changes take place on the *truckRoute* and *truckSubRoutes*.

Returning to Algorithm 5, after the changes have been applied in line 18, we reset the value of  $maxSavings$  to 0 to prepare for the next iteration. Moreover, the algorithm terminates when  $maxSavings = 0$  (line 21).

---

**Algorithm 9:** applyChanges function

---

**Data:**  $isDroneNode, i^*, j^*, k^*, sol, truckRoute, truckSubRoutes, Customers$

**Result:** Updated  $truckRoute, truckSubRoutes, t$

```
1 if  $isDroneNode == True$  then
2   | The Drone is now assigned to  $i^* \rightarrow j^* \rightarrow k^*$ ;
3   | Remove  $j^*$  from  $truckRoute$  and  $truckSubRoutes$ ;
4   | Append a new truck subroute that starts at  $i^*$  and ends at  $k^*$ ;
5   | Remove  $i^*, j^*, k^*$  from  $Customers$ ;
6 else
7   | Remove  $j^*$  from its current truck subroute;
8   | Insert  $j^*$  between  $i^*$  and  $k^*$  in the new truck subroute ;
9 Update  $sol$  using  $truckRoute$  and  $truckSubRoutes$  ;
10 return ( $sol, truckRoute, truckSubRoutes, Customers$ );
```

---

585 **6. Experiment setup**

For the experiments, we generate customer locations randomly on a plane. We consider graphs with 10, 50 and 100 customers. These customers are created in squares with three different areas:  $100 km^2$ ,  $500 km^2$  and  $1000 km^2$ . An instance of the TSP-D is characterised by: customer locations, total area of  
590 the plane, drone endurance, depot location as well as speed, distance types, travelling cost and time of each vehicle, drone launch time and retrieve time. In total, 65 instances are generated; their characteristics are partially shown in Table 1:

Instances	# of Customers	Area ( $km^2$ )	Density	Distance (km)	$ P $
A1 to A5	10	100	1	7.43	595
B1 to B10	50	100	0.5	7.13	73053
C1 to C10	50	500	0.1	15.45	10005
D1 to D10	50	1000	0.05	22.19	2932
E1 to E10	100	100	1	7.14	590144
F1 to F10	100	500	0.2	15.21	81263
G1 to G10	100	1000	0.1	21.59	24666

**Table 1:** Instances of min-cost TSP-D

The numbers in this table represent the average values over each class of instances. Three first columns "Instances", "# of Customers", and "Area" are self-explained. Column "Density" represents the number of customers generated in an area unit while column "Distance" indicates the average Euclidean distance among customers. And finally, column " $|P|$ " implies the number of possible drone deliveries.

For all instances, the speeds of drone and truck are both set to 40 km/h. Moreover,  $d_{ij}$  is calculated using Manhattan distance, while  $d'_{ij}$  is in Euclidean distance. The objective here is to partially simulate the fact that the truck has to travel through a road network (which is longer) and the drone can fly directly from an origin to a destination. The drone's endurance  $\epsilon$  is set to 20 minutes of flight time. The truck's cost  $C_1$  is by default set to 25 times the drone's cost  $C_2$ . Depot location is at the bottom left of the square. To simulate the real situation where not all packages can be delivered by drone, in all instances, only 80 % of customers can be served by drone. Waiting penalty coefficients  $\alpha$  and  $\beta$  are set to 10. And finally, the launch time  $s_L$  and retrieve time  $s_R$  are all set to 1 minute, as in Murray and Chu (2015).

For the results, we denote  $\gamma$ ,  $T$ , and  $\rho$  as the objective value, running time in seconds and performance ratio, respectively, defined as follows:

$$\rho = \frac{value}{referenceValue} \times 100, \quad (54)$$

where *value* is the objective value obtained by the considering algorithm and *referenceValue* is the objective value obtained by a reference algorithm. We  
615 will specify these algorithms for each experiment. Because we are dealing with a minimization problem, a ratio  $\rho$  less than 100 % means that the considered algorithm provides a better solution than the reference algorithm. Furthermore, we denote  $\sigma$  the relative standard deviation percentage in multiple runs. The objective value, running time and performance ratio on average  
620 are denoted as  $\gamma_{avg}$ ,  $T_{avg}$ , and  $\rho_{avg}$ . In addition, the geometric mean, which is more appropriate than the arithmetic mean when analysing normalized performance numbers, is used to calculate the values of  $\rho_{avg}$ ,  $T_{avg}$  (see Fleming and Wallace (1986) for more information).

CPLEX 12.6.2 is used whenever the MILP formulation needs to be solved,  
625 and optimal TSP tours are obtained with the state-of-the-art Concorde solver Applegate et al. (2006). The values of  $k$  in  $k$ -nearest neighbour and  $k$ -cheapest insertion heuristics are chosen randomly between  $\{2, 3\}$  to give the best results. Also by experiment, the value of parameter  $n_{TSP}$  of GRASP is set to 2000 in all tests. And finally, all instances and detailed results are available at  
630 <http://research.ha Quang Minh.com/tspd/index>.

## 7. Results

In this section, we present and analyse the computational results obtained by the proposed methods. The algorithms are implemented in C++ and run on an Intel Core i7-6700 @ 3.4 GHz processor. Different experiments have  
635 been carried out to evaluate the performance of the proposed methods and analyse the impact of parameters: explore the performance of GRASP on different TSP-tour construction heuristics in min-cost TSP-D, compare min-cost TSP-D solutions provided by the proposed heuristics and optimal solutions computed from the MILP formulation (if possible), compare min-cost TSP-D  
640 solutions with TSP solutions (i.e., no drone delivery), compare GRASP with TSP-LS on min-cost TSP-D instances, analyse the impact of the drone/truck

cost ratio in min-cost TSP-D, and verify heuristics' performance under min-time objective as well as the trade-off between two objectives.

7.1. Performance of GRASP on different TSP-tour construction heuristics in the min-cost TSP-D

645

In this subsection, we evaluate the performance of GRASP under three proposed TSP construction heuristics in the min-cost TSP-D. We also analyse the impact of the local search operators on the behaviour of GRASP. For each instance set labeled from B to G, we select 3 instances. Then each combination of instance and TSP construction heuristic will be run 10 times. With 18 instances, 3 heuristics, 2 local search settings (enable/disable), we have in total:  $18 \times 3 \times 10 \times 2 = 1080$  tests. We use TSP optimal solutions (obtained by Concorde) as reference *referenceValue* to calculate the performance ratios  $\rho$ .

650

The columns  $\rho_{avg}^{tsp}$  represent the performance ratio on average of TSP solutions obtained by TSP tour generation heuristics. The columns  $\rho_{avg}^{withLS}$ ,  $\rho_{avg}^{noLS}$  respectively report the performance ratio on average of GRASP with and without local search. The results are presented in Table 2.

655

Instance	$k$ -nearest neighbour					$k$ -cheapest insertion					random insertion				
	$\rho_{avg}^{withLS}$	$\sigma$	$T_{avg}$	$\rho_{avg}^{isp}$	$\rho_{avg}^{noLS}$	$\rho_{avg}^{withLS}$	$\sigma$	$T_{avg}$	$\rho_{avg}^{isp}$	$\rho_{avg}^{noLS}$	$\rho_{avg}^{withLS}$	$\sigma$	$T_{avg}$	$\rho_{avg}^{isp}$	$\rho_{avg}^{noLS}$
B1	66.33	1.26	8.57	142.12	82.55	66.80	0.27	6.94	117.31	77.20	69.92	1.44	66.70	409.23	187.15
B2	74.33	0.66	8.66	146.05	82.25	75.72	1.45	4.56	115.86	82.79	75.80	1.19	58.83	420.47	191.41
B3	71.62	1.22	9.90	137.05	85.11	75.17	0.10	6.09	117.38	86.03	73.80	1.49	57.38	438.95	209.62
C1	71.11	1.01	7.09	143.08	82.05	76.66	1.42	6.23	120.74	85.74	75.44	1.37	43.12	462.91	345.88
C2	72.66	0.91	8.69	150.82	81.78	78.72	0.83	6.54	122.71	84.65	75.80	0.74	52.65	498.46	363.96
C3	81.09	1.58	5.44	147.67	89.66	83.52	0.41	4.67	115.72	87.64	82.46	1.30	43.32	521.19	389.58
D1	77.63	0.79	6.97	146.24	92.73	81.16	0.30	4.85	118.39	89.14	79.36	1.30	58.33	469.68	364.12
D2	72.69	0.81	6.32	140.80	91.17	72.73	0.84	6.08	115.21	81.73	75.11	1.06	51.61	459.79	355.26
D3	74.75	0.74	5.85	144.54	88.93	85.51	0.47	4.27	123.19	90.78	78.04	1.47	52.83	519.60	388.39
E1	70.40	1.21	85.40	137.31	84.81	69.69	0.65	37.35	107.67	76.71	78.07	2.12	605.80	554.25	286.11
E2	70.64	1.13	82.52	135.61	85.71	67.16	0.46	41.68	112.61	74.89	79.31	1.79	605.82	560.64	278.69
E3	71.29	0.64	85.59	135.23	85.79	70.70	0.60	37.46	108.42	76.58	78.93	1.91	605.99	561.45	283.99
F1	75.12	1.27	67.42	144.97	94.16	78.12	0.56	51.06	115.20	84.60	86.37	1.27	604.38	614.22	512.49
F2	74.62	1.40	81.67	148.48	93.44	77.08	1.19	73.21	120.45	86.02	82.57	2.44	604.33	647.65	529.60
F3	76.44	1.27	80.90	137.19	93.56	79.26	0.91	63.74	120.15	87.27	85.02	2.41	604.39	662.81	527.52
G1	78.18	1.81	69.73	149.72	95.99	81.37	0.87	64.65	125.09	89.75	87.29	1.51	604.16	682.44	570.93
G2	78.28	1.36	90.76	148.37	97.76	81.96	0.73	84.38	118.48	89.63	88.66	0.83	604.18	749.13	623.78
G3	74.19	1.04	89.86	146.62	95.86	72.22	0.99	84.66	120.03	82.26	81.75	2.18	604.20	662.59	556.53
Mean	<b>73.88</b>		24.44	143.35	88.92	76.12		17.72	117.39	83.94	79.50		179.69	541.23	362.85

**Table 2:** Performance of GRASP on TSP-tour construction heuristics in min-cost TSP-D

In overall, GRASP with  $k$ -nearest neighbour provided the best performance in terms of solution quality, followed by  $k$ -cheapest insertion and then  
660 random insertion. It is well-known that greedy algorithms such as nearest neighbour and cheapest insertion give better solutions for the TSP than totally random insertion algorithm does (as confirmed again by the columns " $\rho_{avg}^{isp}$ "); the use of good TSP tours is an important factor to improve the quality of our GRASP. However, although  $k$ -cheapest insertion in general gives better  
665 TSP tours than  $k$ -nearest neighbour, TSP-D solutions obtained from  $k$ -nearest neighbour are better than ones obtained from  $k$ -cheapest insertion. The reason could be due to our local search operators which seems to work better with  $k$ -nearest neighbour. In GRASP with  $k$ -cheapest insertion, the local search operators in general converge more prematurely. And as a result, GRASP with  
670  $k$ -cheapest insertion stops earlier than GRASP with  $k$ -nearest neighbour. In addition, we carried out some additional tests and found that, in general, using optimal TSP tours does not provide best solutions for the min-cost TSP-D.

Furthermore, all three heuristics provided stable results with most of standard deviations  $\sigma$  less than 2 %. More precisely, GRASPs with  $k$ -nearest neighbour and  $k$ -cheapest insertion are more stable than GRASP using random insertion heuristic. From these analyses, we decide to use  $k$ -nearest neighbour heuristic to generate TSP tours for GRASP in the next experiments.

### 7.2. Comparison with min-cost TSP-D optimal solutions

In this section, to validate the MILP formulation, we report the results obtained by CPLEX. We also wish to observe the possibility that finds optimal solutions of two approximate approaches GRASP and TSP-LS. The preliminary experiments show that the MILP formulation cannot solve to optimality instances with more than 10 nodes under a time limit of 1 hour. Therefore, in this subsection, we use only the 10-customer instances to compare the solutions obtained by GRASP, TSP-LS and ordinary TSP with the optimal solutions of the min-cost TSP-D computed through the MILP formulation. The *referenceValue* used to compute the ratio  $\rho$  is the optimal min-cost TSP-D solution. For each instance, GRASP is repeatedly run 10 times and we record the number of times (in Column *opt*) it can reach the optimality. The comparison results reported in Table 3 show that GRASP can find all optimal solutions consuming much less computation time than the MILP formulation. On the other hand, although TSP-LS is faster, it can only find one optimal solution. It is clear that GRASP outperforms TSP-LS in terms of solution quality. In details, GRASP shows a stable performance with standard deviation of 0 (which reported in Column  $\sigma$ ) and can reach to optimality in all cases. From the column "TSP", we observe that using the drone allows to save more than 20 % and up to 53 % of operational costs. Next, we focus on analysing the performance of GRASP and TSP-LS on the larger instances.

Instance	TSP		MILP formulation		GRASP					TSP-LS		
	$\gamma$	$\rho$	$\gamma$	$T$	$\gamma_{avg}$	$T_{avg}$	$\rho_{avg}$	$\sigma$	$opt$	$\gamma$	$T$	$\rho$
A1	1007.33	153.01	658.322	46.64	658.322	0.84	100	0	10	810.244	0.013	123.07
A2	955.876	140.58	679.932	144.51	679.932	1.06	100	0	10	777.119	0.006	114.29
A3	985.679	120.31	819.251	133.30	819.251	0.78	100	0	10	819.251	0.005	100
A4	944.645	126.22	748.405	41.31	748.405	1.70	100	0	10	834.89	0.007	111.55
A5	985.679	121.60	810.567	57.18	810.567	1.63	100	0	10	853.728	0.005	105.32

**Table 3:** Comparison with the min-cost TSP-D optimal solution.

### 7.3. Performance of heuristics on the larger instances in the min-cost TSP-D

700 In this subsection, we aim to analyse the performance of GRASP and TSP-LS on the larger min-cost TSP-D instances—those with 50 and 100 customers. Two methods TSP-LS and GRASP are tested and obtained solutions are compared with ones of the ordinary TSP. The *referenceValue* used to compute the ratio  $\rho$  is the objective value of the TSP optimal solution. For each instance, 705 we also report the average waiting times of truck and drone as well as the average latest time at which either the truck or the drone return to the depot (Column  $w_{avg}, w'_{avg}$  and  $t_{avg}$ ). These values are measured in minutes. Again, for each instance, GRASP is repeatedly run 10 times. Tables 4 and 5 show the results for the instances with 50 and 100 customers, respectively.

710 As can be observed, GRASP outperforms TSP-LS in terms of solution quality. In terms of running time, GRASP runs slower. However, considering that it never runs in more than 4 minutes, while performs up to 7 % better than TSP-LS in terms of  $\rho_{avg}$ , this trade-off is worthy.

715 In all cases, GRASP finds the best solutions. Regardless of slower speed, its average computational time is acceptable on even 100-customer instances (about 2.5 minutes averagely). Furthermore, its relative standard deviation percentage – reported in Column  $\sigma$  – is less than 3% in all instances, proving the stability of the algorithm. The results obtained once again prove the effectiveness of using the drone for delivery. GRASP gives solutions with a cost 720 saving of more than 25 % compared with the TSP optimal solutions, which do

not use any drone delivery.

Regarding the waiting times, one can observe that in min-cost TSP-D solutions, truck has to wait for drone most of the time among all instances ( $w_{avg} > w'_{avg}$ ). In details, while drone's waiting times are only a couple of minutes, truck's waiting times make up approximately 25.95% and 26.20% of the delivery completion time ( $t_{avg}$ ) regarding to geometric mean in 50-customer and 100-customer instances, respectively. This could be due to the fact that truck's transportation cost is much larger than drone's transportation cost (25 times larger), the min-cost TSP-D solutions tend to select drone deliveries in which flying distance of drone is quite longer than traveling distance of truck.

$N = 50$	GRASP								TSP-LS	
	$\gamma_{best}$	$\gamma_{avg}$	$\rho_{avg}$	$T_{avg}$	$\sigma$	$w_{avg}$	$w'_{avg}$	$t_{avg}$	$\rho_{avg}$	$T_{avg}$
B1	1372.82	1413.24	66.59	16.30	1.34	70.48	0.56	192.52	78.62	0.40
B2	1491.30	1513.98	73.42	15.67	0.48	36.13	1.00	162.78	77.42	0.34
B3	1503.78	1521.67	72.06	16.70	0.68	44.11	1.57	165.46	81.44	0.28
B4	1396.17	1426.20	65.33	15.92	0.98	66.97	0.13	190.45	79.38	1.01
B5	1457.91	1500.90	71.52	18.73	1.51	53.38	1.94	178.12	81.28	0.39
B6	1316.08	1353.76	63.87	15.94	1.04	81.87	0.57	198.83	75.51	0.30
B7	1370.05	1399.71	65.90	14.27	0.83	63.16	1.46	183.53	78.69	0.30
B8	1484.93	1517.23	73.24	15.23	0.95	60.04	0.41	184.35	83.03	0.28
B9	1442.09	1468.86	70.27	17.05	0.94	43.65	3.87	168.32	79.19	0.31
B10	1392.54	1429.57	67.94	15.19	1.04	54.40	0.08	174.44	75.62	0.33
C1	2870.41	2935.87	71.70	12.62	0.88	112.76	2.47	318.15	79.52	0.12
C2	2804.47	2868.67	72.97	15.74	0.75	88.56	2.43	293.69	78.67	0.12
C3	3087.55	3185.09	81.87	9.73	1.07	56.35	4.03	272.77	83.06	0.14
C4	2844.10	2916.86	70.97	11.78	0.70	91.54	1.37	297.05	82.39	0.16
C5	3323.92	3367.34	80.54	11.40	0.57	58.89	4.72	286.26	89.21	0.09
C6	3433.99	3472.39	79.79	11.24	0.65	68.47	3.43	301.24	86.71	0.12
C7	3001.13	3047.71	71.92	12.86	0.64	105.33	0.58	317.15	80.75	0.11
C8	3481.17	3557.99	82.21	13.07	1.02	71.66	3.02	312.14	86.84	0.10
C9	3267.23	3306.38	75.35	11.56	0.40	85.48	0.46	311.73	80.09	0.27
C10	3291.20	3356.29	78.34	13.77	0.84	74.47	1.29	304.23	82.22	0.14
D1	4159.39	4389.24	76.86	12.87	1.61	93.40	1.61	382.41	89.35	0.10
D2	4275.46	4334.40	72.32	11.67	0.52	106.81	2.42	392.96	76.75	0.06
D3	4085.71	4191.08	75.25	11.06	1.01	92.96	1.59	368.91	82.21	0.07
D4	4612.46	4714.62	77.14	12.74	0.80	91.33	1.96	399.14	80.52	0.11
D5	4717.67	4793.39	80.26	11.70	0.79	77.54	0.97	390.97	82.89	0.06
D6	4405.02	4485.87	78.64	11.73	0.79	78.61	2.87	373.53	85.93	0.06
D7	4749.57	4796.23	82.77	15.06	0.46	68.48	7.74	384.65	86.69	0.07
D8	4143.03	4287.87	77.71	11.99	1.56	90.75	1.05	374.24	87.62	0.06
D9	4653.73	4688.16	76.11	13.39	0.50	86.84	4.82	392.72	86.34	0.17
D10	4260.60	4301.83	75.33	11.96	0.41	91.95	5.98	375.94	78.89	0.08
Mean			<b>74.09</b>	13.46					81.80	0.15

**Table 4:** Performance of heuristics on 50-customer instances in the min-cost TSP-D

$N = 100$	GRASP								TSP-LS	
	$\gamma_{best}$	$\gamma_{avg}$	$\rho_{avg}$	$T_{avg}$	$\sigma$	$w_{avg}$	$w'_{avg}$	$t_{avg}$	$\rho_{avg}$	$T_{avg}$
E1	2206.53	2255.99	70.64	137.02	0.96	81.22	1.75	293.35	76.22	5.52
E2	2210.61	2273.09	70.53	136.68	1.08	77.09	2.21	288.01	76.26	5.90
E3	2248.16	2312.76	71.43	148.62	1.09	77.57	1.71	287.39	72.41	6.09
E4	2179.06	2223.97	70.35	178.37	0.90	75.97	1.69	282.29	78.14	6.02
E5	2286.16	2360.30	73.58	172.10	1.31	60.15	2.26	269.52	77.85	6.17
E6	2244.62	2313.86	71.89	195.51	1.05	74.50	1.87	286.99	78.14	5.89
E7	2249.09	2313.67	71.94	190.84	0.90	67.23	2.28	279.10	82.33	6.32
E8	2220.88	2272.55	70.66	189.24	0.79	71.45	1.40	280.26	72.37	6.64
E9	2279.91	2326.29	72.33	172.03	0.83	67.60	1.72	277.53	74.74	5.72
E10	2324.74	2384.52	74.30	204.74	0.96	64.16	1.94	277.90	77.23	4.98
F1	4569.83	4648.20	76.20	111.07	0.85	109.53	6.36	443.43	83.13	1.23
F2	4186.76	4318.78	74.74	143.07	1.47	138.73	2.39	459.57	80.43	1.19
F3	4414.38	4563.64	76.57	146.75	1.31	119.39	6.88	454.68	81.77	1.46
F4	4499.09	4600.27	79.53	128.53	1.25	123.85	3.15	456.31	80.99	1.38
F5	4381.37	4597.32	76.34	159.76	1.66	129.97	1.88	464.85	80.65	1.13
F6	4032.90	4171.80	74.54	157.70	1.53	130.63	3.55	442.99	79.74	1.06
F7	4076.31	4213.52	72.64	170.14	1.62	159.33	1.44	478.18	74.39	1.29
F8	4491.20	4597.90	75.37	165.96	0.98	126.90	4.52	464.09	82.89	1.31
F9	4388.91	4463.39	75.24	153.04	0.90	124.91	3.43	455.09	83.62	1.52
F10	4173.64	4567.84	76.48	153.99	2.31	118.52	3.07	451.57	80.48	1.51
G1	5947.97	6148.50	77.05	116.24	1.61	163.73	3.72	589.97	79.66	0.65
G2	5882.97	5987.64	79.70	158.00	0.76	118.74	5.14	532.92	81.70	0.52
G3	6074.57	6138.94	74.64	169.26	0.80	163.40	2.78	585.57	78.02	1.03
G4	6458.96	6632.14	82.34	143.47	1.16	135.84	5.02	588.44	85.79	0.90
G5	6198.95	6329.25	80.46	155.52	0.73	127.68	4.00	563.97	82.04	0.58
G6	6049.34	6343.26	77.02	177.07	1.69	149.52	6.42	589.69	81.67	0.64
G7	5889.08	6023.11	75.66	171.24	0.88	141.96	4.50	557.86	75.98	0.81
G8	5599.55	5871.96	71.99	156.90	1.87	159.24	6.95	570.88	80.03	0.86
G9	6050.80	6254.50	74.29	184.69	1.48	174.62	2.73	609.20	80.87	0.89
G10	6249.69	6534.13	79.63	162.11	1.97	124.85	6.79	572.85	83.47	0.78
Mean			<b>74.87</b>	158.77					79.36	1.79

**Table 5:** Performance of heuristics on 100-customer instances in the min-cost TSP-D

#### 7.4. Impact of cost ratio in the min-cost TSP-D

In this experiment, we explore the impact of the drone/truck cost ratio on the objective values of the min-cost TSP-D solutions provided by the GRASP and TSP-LS algorithms. By default, this parameter is set to 1:25; therefore, we added two more ratios, 1:10 and 1:50. Table 6 shows the geometric mean values of  $\rho_{avg}$  for the two heuristics. The *referenceValue* used to compute the ratio  $\rho$  is the objective value of the TSP optimal solution. Again, for each instance, GRASP is repeatedly run 10 times.

Logically, the value of  $\rho_{avg}$  should decrease as the ratio increases. However, it does not reduce proportionally. More specifically, for GRASP, when the ratio changes from 1:10 to 1:25, the mean of  $\rho_{avg}$  decreases by approximately 5% for the 50-customer instances and approximately 6% for the 100-customer instances. In contrast, as the ratio changes from 1:25 to 1:50, the mean of  $\rho_{avg}$  decreases by only approximately 3% in both cases. The same phenomenon is observed for TSP-LS. Consequently, when constructing distribution networks for drone/truck combinations, overestimating the transportation cost of the drone does not always improve significantly the results. This means that the efficiency of investment in improving the cost ratio should be carefully considered because such an investment may prove more expensive than the savings in operational costs.

Varying the cost ratio does not significantly impact the relative performance between the heuristics. The GRASP still outperforms the TSP-LS in all cases in terms of solution quality but is slower in terms of running time.

Cost ratio	N = 50		N=100	
	GRASP	TSP-LS	GRASP	TSP-LS
1:10	79.41	84.94	80.63	82.92
1:25	74.09	81.80	74.86	79.36
1:50	71.93	80.70	72.53	78.05

**Table 6:** Performance of heuristics with different cost-ratio settings in min-cost TSP-D.

### 7.5. Performance of heuristics with min-time objective

755 In this section, we analyse the performance of proposed algorithms under min-time objective. We first compare the solutions provided by GRASP with the best ones found by Murray and Chu (2015) on 10-customer instances. We then evaluate the performance of these two heuristics on the larger instances proposed in Section 6.

#### 760 7.5.1. Performance on small instances

We now compare the performance of GRASP with Murray et al. - the best recorded results found in Murray and Chu (2015) on small size instances of 10 customers spreading in a region of 8-mile square. These results have been selected from different approaches proposed in Murray and Chu (2015) including MILP formulation with Gurobi solver and FSTSP heuristic with different  
765 TSP tour constructions (IP, Savings, Nearest Neighbor, and Sweep). The detailed results are presented in Table 7. The best found solutions are appeared in bold. Column  $\epsilon$  represents the drone's endurance in minutes, while column "TSP" contains the optimal TSP solution values.

770 In overall, GRASP performs better than the methods presented in Murray and Chu (2015). Among 72 instances, GRASP provides solutions worse than those of Murray et al. in only three instances while improves the results of Murray et al. in 20 instances. These results demonstrate the performance of our algorithm to solve not only min-cost TSP-D but also min-time TSP-D.

Instance	$\epsilon$	TSP	Murray et al.	GRASP	Instance	$\epsilon$	TSP	Murray et al.	GRASP
37v1	20	57.446	<b>56.468</b>	<b>56.468</b>	40v7	20	60.455	49.996	<b>49.470</b>
37v1	40	57.446	<b>50.573</b>	<b>50.573</b>	40v7	40	60.455	<b>49.204</b>	49.233
37v2	20	54.184	<b>53.207</b>	<b>53.207</b>	40v8	20	73.255	62.796	<b>62.270</b>
37v2	40	54.184	<b>47.311</b>	<b>47.311</b>	40v8	40	73.255	62.270	<b>62.033</b>
37v3	20	54.664	<b>53.687</b>	<b>53.687</b>	40v9	20	54.517	42.799	<b>42.533</b>
37v3	40	54.664	<b>53.687</b>	<b>53.687</b>	40v9	40	54.517	42.799	<b>42.533</b>
37v4	20	67.464	<b>67.464</b>	<b>67.464</b>	40v10	20	54.055	<b>43.076</b>	<b>43.076</b>
37v4	40	67.464	<b>66.487</b>	<b>66.487</b>	40v10	40	54.055	<b>43.076</b>	<b>43.076</b>
37v5	20	58.022	50.551	<b>47.457</b>	40v11	20	60.455	<b>49.204</b>	<b>49.204</b>
37v5	40	58.022	<b>45.835</b>	<b>45.835</b>	40v11	40	60.455	<b>49.204</b>	<b>49.204</b>
37v6	20	54.184	45.176	<b>45.145</b>	40v12	20	73.255	<b>62.004</b>	<b>62.004</b>
37v6	40	54.184	45.863	<b>44.602</b>	40v12	40	73.255	<b>62.004</b>	<b>62.004</b>
37v7	20	54.664	<b>49.581</b>	<b>49.581</b>	43v1	20	69.586	<b>69.586</b>	<b>69.586</b>
37v7	40	54.664	<b>46.621</b>	46.754	43v1	40	69.586	<b>55.493</b>	<b>55.493</b>
37v8	20	67.464	<b>62.381</b>	<b>62.381</b>	43v2	20	72.146	<b>72.146</b>	<b>72.146</b>
37v8	40	67.464	59.776	<b>59.614</b>	43v2	40	72.146	<b>58.053</b>	<b>58.053</b>
37v9	20	58.022	45.985	<b>42.585</b>	43v3	20	77.344	<b>77.344</b>	<b>77.344</b>
37v9	40	58.022	<b>42.416</b>	<b>42.416</b>	43v3	40	77.344	<b>69.175</b>	<b>69.175</b>
37v10	20	54.184	42.416	<b>41.908</b>	43v4	20	90.144	<b>90.144</b>	<b>90.144</b>
37v10	40	54.184	41.729	<b>40.908</b>	43v4	40	90.144	<b>82.700</b>	<b>82.700</b>
37v11	20	54.664	<b>42.896</b>	<b>42.896</b>	43v5	20	69.586	55.493	<b>53.053</b>
37v11	40	54.664	<b>42.896</b>	<b>42.896</b>	43v5	40	69.586	53.447	<b>52.093</b>
37v12	20	67.464	<b>56.696</b>	<b>56.696</b>	43v6	20	72.146	58.053	<b>55.209</b>
37v12	40	67.464	<b>55.696</b>	<b>55.696</b>	43v6	40	72.146	<b>52.329</b>	<b>52.329</b>
40v1	20	54.517	<b>49.430</b>	<b>49.430</b>	43v7	20	77.344	<b>64.409</b>	<b>64.409</b>
40v1	40	54.517	<b>46.886</b>	<b>46.886</b>	43v7	40	77.344	<b>60.743</b>	60.886
40v2	20	54.055	<b>50.708</b>	<b>50.708</b>	43v8	20	90.144	<b>77.209</b>	<b>77.209</b>
40v2	40	54.055	<b>46.423</b>	<b>46.423</b>	43v8	40	90.144	73.967	<b>73.727</b>
40v3	20	60.455	<b>56.102</b>	<b>56.102</b>	43v9	20	69.586	49.049	<b>46.931</b>
40v3	40	60.455	<b>53.933</b>	<b>53.933</b>	43v9	40	69.586	47.250	<b>46.931</b>
40v4	20	73.255	<b>69.902</b>	<b>69.902</b>	43v10	20	72.146	<b>47.935</b>	<b>47.935</b>
40v4	40	73.255	68.397	<b>67.917</b>	43v10	40	72.146	<b>47.935</b>	<b>47.935</b>
40v5	20	54.517	<b>43.533</b>	<b>43.533</b>	43v11	20	77.344	57.382	<b>56.395</b>
40v5	40	54.517	<b>43.533</b>	<b>43.533</b>	43v11	40	77.344	<b>56.395</b>	<b>56.395</b>
40v6	20	54.055	<b>44.076</b>	<b>44.076</b>	43v12	20	90.144	<b>69.195</b>	<b>69.195</b>
40v6	40	54.055	<b>44.076</b>	<b>44.076</b>	43v12	40	90.144	<b>69.195</b>	<b>69.195</b>

**Table 7:** Comparison between GRASP and the best solutions found by Murray and Chu (2015)

### 7.5.2. Performance on larger instances

Since larger instances of the min-time TSP-D are not available in the literature, we use the instances proposed in this work to analyse further the performance of GRASP and TSP-LS under min-time objective. Moreover, we vary the drone's speed among three values 25 km/h, 40 km/h and 55 km/h as in Murray and Chu (2015). Again, GRASP is repeatedly run 10 times for each combination of instance and drone's speed. Some preliminary experiments show that, on many min-time TSP-D instances, solutions provided by GRASP were worse than ones provided by TSP-LS and even ordinary TSP. Upon further investigation, we found out that very few drone deliveries were used and min-time TSP solutions were not far from TSP solutions. As a result, TSP-LS which constructs optimal TSP tours and then improves them with local search operators could perform better than GRASP. In this experiment, we use an additional setting of GRASP that we call GRASP+: only one iteration with an optimal TSP tour is performed.

The results are shown in Table 8. The columns and their descriptions are similar to Tables 4 and 5 in Section 7.3 except that the *referenceValue* used to compute the ratio  $\rho$  is the objective value of the TSP optimal solution regarding to traveling time (instead of transportation cost in the previous section). In addition, the average objective value of GRASP+ is reported in minutes in Column  $\gamma_{avg}$ .

As can be observed, GRASP has better performance than TSP-LS on 50-customer instances, but performs slightly worse than TSP-LS on 100-customer instances regarding to solution quality. Its solutions are even worse than those of optimal TSP on the instances of class "E". This phenomenon could be due to high launch and retrieve times of drone (totally 2 minutes while the average traveling time of truck between two customers is only about 30 seconds - See Table 1) leading to the low frequency of using drone in min-time TSP-D solutions. This also leads to an observation that, on the instances generated in

805 wider regions, more drone deliveries are used and more savings in objective values of the min-time TSP-D are created. For example, the instances of type "E" have averagely 590,144 possibilities of drone deliveries and 100 customers, but only less than 6 drone deliveries are used (as showed in Table 10 of the next section). But on the instances of types "F" and "G", the number of average  
810 used drone deliveries increases to 16 and 19, respectively. GRASP is still much slower than TSP-LS due to its higher-level characteristic, but similarly to Section 7.3, its running time is acceptable, slightly more than a minute in terms of geometric mean.

In overall, GRASP+ performs better than TSP-LS on all instance classes  
815 in terms of solution quality. Regarding the running time, GRASP+ also runs much faster with the average running time less than 0.1 second. These demonstrate the performance of our Split and local search operators.

In terms of waiting times (Columns  $w_{avg}$  and  $w'_{avg}$ ), we can observe an opposite phenomenon with respect to Section 7.3. Unlike min-cost TSP-D  
820 solutions where truck has to wait for drone most of the time ( $w_{avg} > w'_{avg}$ ), min-time solutions tend to choose drone deliveries in which drone has to wait for truck ( $w_{avg} < w'_{avg}$ ).

Instances	GRASP+					GRASP		TSP-LS	
	$\gamma_{avg}$	$\rho_{avg}$	$T_{avg}$	$w_{avg}$	$w'_{avg}$	$\rho_{avg}$	$T_{avg}$	$\rho_{avg}$	$T_{avg}$
B	121.2	95.88	0.01	2.51	21.64	96.16	25.64	97.56	0.22
C	232.8	92.80	0.01	4.93	28.08	93.40	21.09	94.28	0.10
D	323.4	92.49	0.01	9.14	29.14	92.84	22.33	94.08	0.08
E	190.2	98.86	0.04	0.14	30.77	101.79	275.08	98.88	1.62
F	334.8	94.49	0.03	2.97	52.84	97.86	151.60	96.88	0.44
G	449.4	92.90	0.02	6.34	51.15	96.91	142.16	95.13	0.33
Mean		<b>94.54</b>	0.01			96.45	64.44	96.12	0.27

**Table 8:** Performance of heuristics of min-time TSP-D

### 7.6. Comparison between min-cost and min-time objectives

In this experiment, we compare the TSP-D under two objectives in terms of performance ratios and the frequency of using drones given the results from Sections 7.3 and 7.5.2. The experimental results are presented in Tables 9 and 10.

In Table 9, Columns  $\rho_{min-time}^{time}$  and  $\rho_{min-time}^{cost}$  represent the performance ratios of two objective values, i.e. delivery completion time and operational cost, of the best solutions found in min-time TSP-D problems. Similarly, Columns  $\rho_{min-cost}^{time}$  and  $\rho_{min-cost}^{cost}$  are delivery completion time and operational cost of the best solution found in min-cost TSP-D problems. Again, the value in performance ratio is the optimal TSP solution calculated in time and cost, depending on the objective type. In overall, min-time TSP-D solutions not only reduce the delivery completion time but also the operational cost compared to corresponding optimal TSP solutions. In contrast, min-cost TSP-D solutions increase the completion time compared to optimal TSP solutions by up to 56.25 % and 43.55 % for 50 and 100-customer instances. However, min-cost TSP-D solutions can save averagely 30 % of the operational cost compared to 20 % of min-time TSP-D solutions. This proves the importance of the new min-cost objective function in the class of transportation problems with drone.

Instances	$\rho_{min-time}^{time}$	$\rho_{min-time}^{cost}$	$\rho_{min-cost}^{time}$	$\rho_{min-cost}^{cost}$
B	91.83	80.60	156.25	62.10
C	86.37	76.89	115.35	69.20
D	81.82	77.29	108.31	71.34
E	97.31	90.27	143.55	68.59
F	90.88	81.31	128.44	69.88
G	85.63	77.07	111.15	68.65
Mean	88.83	80.44	125.99	68.23

**Table 9:** Trade-off between min-cost and min-time in terms of performance ratio

In Table 10, we observe the number of times the drone is used in both

min-cost TSP-D solutions (Column "Min-Cost") and min-time TSP-D solutions (Columns "Min-Time 25", "Min-Time 40" and "Min-Time 55" representing the cases where the drone speed is set respectively to 25 km/h, 40 km/h and 55 km/h). The results show that min-cost solutions tend to use the drone to service up to 40% of the customers whereas min-time solutions only use the drone to service up to 22% of the customers. This is because, as analysed above, using drone likely helps to reduce the transportation cost but this is not the case for the delivery completion time. Additionally, increasing drone speed leads to higher frequency of using drones.

Instances	Number of drone uses			
	Min-Cost	Min-Time 25	Min-Time 40	Min-Time 55
B	20.27	4.70	6.96	8.04
C	18.19	4.43	9.46	11.27
D	17.89	3.10	10.20	12.47
E	39.95	5.30	5.77	5.83
F	36.77	9.57	15.97	18.58
G	36.44	8.73	18.66	21.90

**Table 10:** *The frequency of using drone in two objective functions*

## 8. Conclusion

This paper presents a new variant of the Traveling Salesman Problem with Drone (TSP-D) whose objective is to minimize the total operational costs including the transportation cost and the waiting penalties. We propose a model, a mixed integer linear programming formulation and two heuristic methods—GRASP and TSP-LS—to solve the problem. The MILP formulation is an extension of the mathematical model propose in Murray and Chu (2015); TSP-LS is adapted from an existing heuristic, while GRASP is based on our new split algorithm and local search operators. Numerous experiments conducted on a variety of instances of both objective functions show the performance of our GRASP algorithm. Overall, it outperforms TSP-LS in terms of solution quality in an acceptable running time. The results also demonstrate

the important role of the new objective function in the new class of vehi-  
865 cle routing problems with drone. Future researches could aim for proposing  
more efficient metaheuristics which based on our split procedure. The exten-  
sion of the proposed methods to solve problems with multiple vehicles and  
multiple drones could be also an interesting research direction.

### Acknowledgement

870 This research is funded by Vietnam National Foundation for Science and  
Technology Development (NAFOSTED) under grant number FWO.102.2013.04.

The authors thank Professor Chase C. Murray for his kind support by  
sending us the instances and detailed results of the min-time TSP-D problem.

### References

875 Agatz, N., Bouman, P., Schmidt, M., 2016. Optimization approaches for the  
traveling salesman problem with drone. ERIM Report Series Reference No.  
ERS-2015-011-LIS .

Applegate, D., Bixby, R., Chvatal, V., Cook, W., 2006. Concorde tsp solver.

Banker, S., 2013. Amazon and drones – here is why it will work.  
880 URL: <http://www.forbes.com/sites/stevebanker/2013/12/19/amazon-drones-here-is-why-it-will-work/>. [Accessed November 13th, 2017].

Bouman, P., Agatz, N., Schmidt, M., 2017. Dynamic programming approaches  
for the traveling salesman problem with drone. Erasmus Research Institute  
of Management - ERIM Research Paper Series .

885 Cattaruzza, D., Absi, N., Feillet, D., Vidal, T., 2014. A memetic algorithm for  
the multi trip vehicle routing problem. European Journal of Operational  
Research 236, 833–848.

- Cuthbertson, A., 2016. Australia post to launch drone delivery service. URL: <http://www.newsweek.com/australia-post-drone-delivery-service-drones-449442>. [Accessed November 13th, 2017].
- 890
- Dawn Russell, John J. Coyle, K.R., Thomchick, E.A., 2014. The real impact of high transportation costs. URL: <http://www.supplychainquarterly.com/topics/Logistics/20140311-the-real-impact-of-high-transportation-costs/>. [Accessed November 13th, 2017].
- 895
- Fleming, P.J., Wallace, J.J., 1986. How not to lie with statistics: the correct way to summarize benchmark results. *Communications of the ACM* 29, 218–221.
- French, S., 2015. Drone delivery is already here and it works. URL: <http://www.marketwatch.com/story/drone-delivery-is-already-here-and-it-works-2015-11-30>. [Accessed November 13th, 2017].
- 900
- Gendreau, M., Potvin, J.Y., 2010. *Handbook of metaheuristics*. volume 2. Springer.
- Grothaus, M., 2016. This is how google’s project wing drone delivery service could work. URL: <http://www.fastcompany.com/3055961/fast-feed/this-is-how-googles-project-wing-drone-delivery-service-could-work>. [Accessed November 13th, 2017].
- 905
- Gutin, G., Punnen, A.P., 2006. *The traveling salesman problem and its variations*. volume 12. Springer Science & Business Media.
- Kindervater, G.A., Savelsbergh, M.W., 1997. Vehicle routing: handling edge exchanges. *Local search in combinatorial optimization* , 337–360.
- 910
- Mathew, N., Smith, S.L., Waslander, S.L., 2015. Planning paths for package delivery in heterogeneous multirobot teams. *Automation Science and Engineering, IEEE Transactions on* 12, 1298–1308.
- Murphy, M., 2016. This is how google wants its drones to deliver stuff to you. URL: <http://qz.com/670670/this-is-how-google-wants-its-drones-to-deliver-stuff-to-you/>. [Accessed November 13th, 2017].
- 915

- Murray, C.C., Chu, A.G., 2015. The flying sidekick traveling salesman problem: Optimization of drone-assisted parcel delivery. *Transportation Research Part C: Emerging Technologies* 54, 86–109.
- News, C., 2013. Amazon unveils futuristic plan: Delivery by drone. URL: <http://www.cbsnews.com/news/amazon-unveils-futuristic-plan-delivery-by-drone/>. [Accessed November 13th, 2017].
- News, C., 2016. Japanese company launches drone delivery service on the golf course. URL: <http://www.ctvnews.ca/sci-tech/japanese-company-launches-drone-delivery-service-on-the-golf-course-1.2875191>. [Accessed November 13th, 2017].
- Nozick, L.K., Turnquist, M.A., 2001. Inventory, transportation, service quality and the location of distribution centers. *European Journal of Operational Research* 129, 362–371.
- Pogue, D., 2016. Exclusive: Amazon reveals details about its crazy drone delivery program. URL: <https://www.yahoo.com/tech/exclusive-amazon-reveals-details-about-1343951725436982.html>. [Accessed November 13th, 2017].
- Poikonen, S., Wang, X., Golden, B., 2017. The vehicle routing problem with drones: Extended models and connections. *Wiley Networks journal* 70.
- Ponza, A., 2016. Optimization of drone-assisted parcel delivery. Master thesis URL: [http://tesi.cab.unipd.it/51947/1/Andrea\\_Ponza\\_-\\_Analisi\\_e\\_ottimizzazione\\_nell'uso\\_di\\_droni\\_per\\_la\\_consegna\\_di\\_prodotti.pdf](http://tesi.cab.unipd.it/51947/1/Andrea_Ponza_-_Analisi_e_ottimizzazione_nell'uso_di_droni_per_la_consegna_di_prodotti.pdf). [Accessed November 13th, 2017].
- Prins, C., 2004. A simple and effective evolutionary algorithm for the vehicle routing problem. *Computers & Operations Research* 31, 1985–2002.
- Prins, C., 2009. A grasp× evolutionary local search hybrid for the vehicle routing problem, in: *Bio-inspired algorithms for the vehicle routing problem*. Springer, pp. 35–53.

- Prins, C., Labadi, N., Reghioui, M., 2009. Tour splitting algorithms for vehicle  
945 routing problems. *International Journal of Production Research* 47, 507–535.
- Rizzoli, A.E., Montemanni, R., Lucibello, E., Gambardella, L.M., 2007. Ant  
colony optimization for real-world vehicle routing problems. *Swarm Intel-  
ligence* 1, 135–151.
- Robinson, A., 2014. Logistics and transportation expenses: Understanding  
950 their role in the cost of doing business. URL: [http://cerasis.com/2014/  
02/14/transportation-expenses/](http://cerasis.com/2014/02/14/transportation-expenses/). [Accessed November 13th, 2017].
- Toor, A., 2016. This startup is using drones to deliver medicine in  
rwanda. URL: [http://www.theverge.com/2016/4/5/11367274/zipline-  
drone-delivery-rwanda-medicine-blood](http://www.theverge.com/2016/4/5/11367274/zipline-drone-delivery-rwanda-medicine-blood). [Accessed November 13th,  
955 2017].
- Vidal, T., Crainic, T.G., Gendreau, M., Prins, C., 2013. A hybrid genetic al-  
gorithm with adaptive diversity management for a large class of vehicle  
routing problems with time-windows. *Computers & OR* 40, 475–489.
- Vidal, T., Crainic, T.G., Gendreau, M., Prins, C., 2014. A unified solution  
960 framework for multi-attribute vehicle routing problems. *European Journal  
of Operational Research* 234, 658–673.
- Wang, X., Poikonen, S., Golden, B., 2016. The vehicle routing problem with  
drones: several worst-case results. *Optimization Letters* 11, 1–19.
- WOHLSEN, M., 2014. The next big thing you missed: Amazon’s  
965 delivery drones could work—they just need trucks. URL: [http:  
//www.wired.com/2014/06/the-next-big-thing-you-missed-delivery-  
drones-launched-from-trucks-are-the-future-of-shipping/](http://www.wired.com/2014/06/the-next-big-thing-you-missed-delivery-drones-launched-from-trucks-are-the-future-of-shipping/). [Ac-  
cessed November 13th, 2017].